
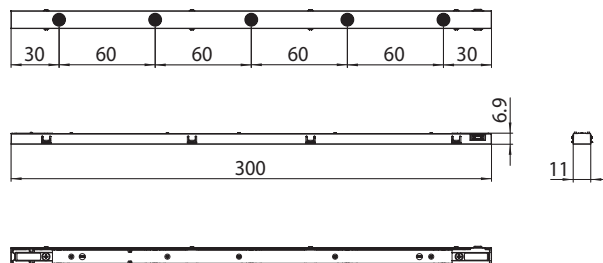


Modulo di luce lineare a 48V. Fissaggio meccanico. Per binari 9600 micro. Lenti ellittiche in policarbonato. Corpo in poliammide. L(mm): 300. 3000K. CRI≥90: LED.

48V Linear light module. Mechanical fixing. For 9600 micro tracks. Polycarbonate elliptical lens. Polyamide body. L(mm): 300. 3000K. CRI≥90: LED.

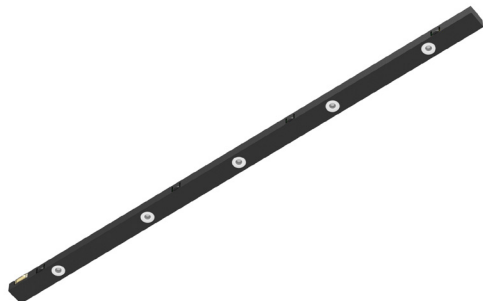

48V

IP20

RG0



Real Flux (lm): 289,0*

Nominal Flux (lm): 440,1

Real Power (W): 4,9* ±10%

Efficiency (lm/W): 58,9*

LED source: LED

Colour Temperature (K): 3000

CRI: ≥90

MacAdam: ≤3

Beam Angle: 21,6°x37,6°

UGR:

X=4H Y=8H	S=0.25H
Reflection factors:	70/50/20
UGR transversal:	18,8
UGR axial:	18,6

Lifetime (Khr): >50 L90B10

Driver: DALI SELV

V_F: ~ 15

I LED (mA): 300

L (mm): 300



Weight (g): 25

Materials: Lenti 26°x42° in policarbonato + corpo in poliammide
Polycarbonate 26°x42° lens + polyamide body

Colour: Adattatore nero / Black adapter

Mounting: Meccanico / Mechanical

Packaging: Tubo / Tube

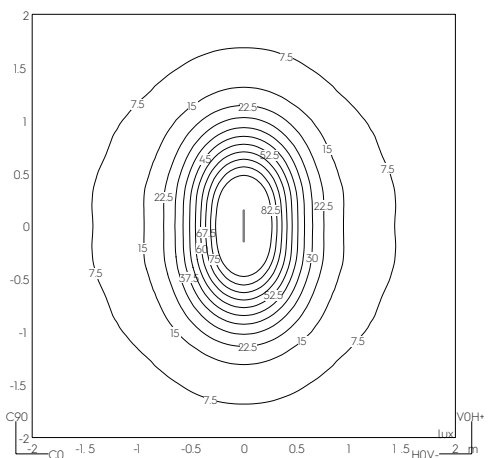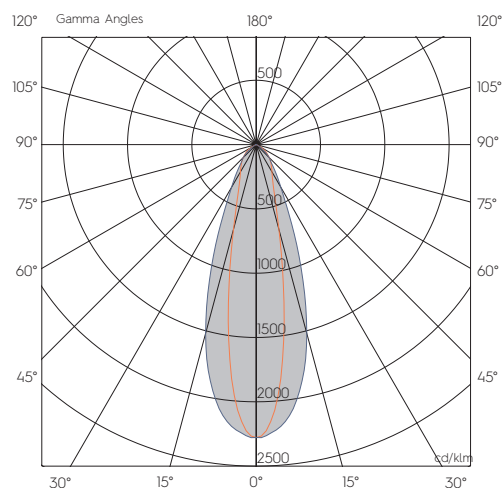

Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica. Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other colour temperatures and CRI available upon request. All values marked with an (*) are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Luminous flux is subject to a normal technology drop over time. A.A.G. Stucchi reserves the right to make technical changes without prior notice.