

luxSPAN SFI 40 PIR 16DP bDW ZB18

Casambi Ready wireless modules



Product description

- _ Monitoring of ambient light and occupancy detection
- _ Can be integrated in Casambi systems (Casambi Ready)
- _ Wireless controllable with an Android / iOS smart device
- _ Forms automatically a wireless communication network with up to 250 nodes
- _ Digital output: Standalone DALI (compatible)
- _ Low energy consumption over bus supply
- _ Ready for Zhaga Book 18 Ed. 3 receptacle for easy and flexible installation to luminaire
- _ Lifetime up to 50,000 h at $t_c = 60^\circ\text{C}$
- _ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions>)
- _ We will provide security updates for the next five years after the date of purchase of this product

Housing properties

- _ Black (RAL 9005)
- _ Type of protection up to IP66
- _ Impact protection degree IK08 (lens excluded)

Benefits

- _ Simplified luminaire design: By integrating a bDW node into the PIR sensor in a single device, only one Zhaga socket is required
- _ Flexible: Individual adjustment of parameters with configuration software
- _ Integrated solution: Combines connected luminaires and light-on-demand functionality in a single device

Typical applications

- _ Round detection area ideal for high-bay industrial luminaires


Website

<http://www.tridonic.com/28006588>



luxSPAN SFI 40 PIR 16DP bDW ZB18

Casambi Ready wireless modules

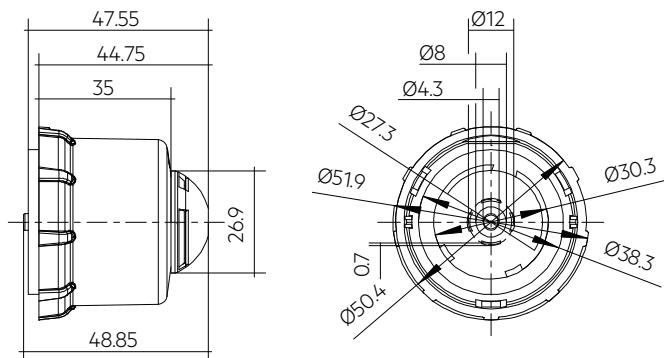

Ordering data

Type	Article number	Packaging, carton	Weight per pc.
luxSPAN SFI 40 PIR 16DP bDW ZB18 BK	28006588	15 pc(s).	0.054 kg

Technical data

Sensor type	PIR sensor
Supply via	DALI (compatible)
Supply voltage ^①	9.5 – 22.5 V
Current consumption typ.	10 mA
Current consumption max.	30 mA
Starting time	30 s
Mounting height	10 – 16 m
Mounting hole	acc. to Zhaga Book 18 Ed. 3
Type of installation ^②	Zhaga Book 18 Ed. 3 socket
Detection angle for PIR detection	62°
Detection angle for light measurement	24°
Detection range for light measurement ^③	1 – 1,000 lx
Min. temperature difference between ambient temperature and detected object	± 4 °C
Radio transceiver operating frequencies	2.4 – 2,483 GHz
Max. output power radio transceiver (E.I. R.P.) ^④	< + 20 dBm
Radio protocol	Bluetooth 4.0 or 5.0 Low Energy (BLE)
Capable for mesh network	Up to 250 nodes
Interface	Digital interface according to DALI
Ambient temperature ta ^⑤	-20 ... +50 °C
tc point	60 °C
Storage temperature ts	-25 ... +60 °C
Humidity	20 ... 90 %
Dimensions Ø x H	Ø 48.85 x 50.4 mm
Housing material body	PC polycarbonate
Housing material lens	HDPE
Housing colour body	black (RAL 9005)
Housing colour lens	Transparent white
Type of protection ^⑥	IP66
Impact protection degree ^⑦	IK08

Approval marks



Standards

EN 55015, EN 61347-1, EN 61347-2-11, EN 61547, EN 62493, EN 62479, EN 300 328, EN 301 489-1, EN 301 489-17, IEC 62386-103, EN 18031-1

^① Uin acc. IEC 62386-101.

^② Device must be installed on the bottom side of the luminaire.

- ③ The measured value at the sensor head corresponds to 20 – 90 % of the lux value measured on the surface located below the sensor.
- ④ E.I.R.P.: Equivalent Isotropically Radiated Power.
- ⑤ Correct sensor operation can not be guaranteed if operated outside this ta window.
- ⑥ It is essential to mount the plug connection (AZU Z18 Set) and sensor correctly to achieve the full IP and IK rating. These impact protection degree does not apply to the lens.

ACU Z18 G2 Set

Accessory



ACU Z18 REP 4PIN G2



ACU Z18 CAP IP66 G2



ACU Z18 REP 4PIN + ACU Z18 CAP IP66

Product description

- _ Set consisting of receptacle, lock washer and mounting nut (ACU Z18 REP 4PIN G2)
- _ Designed for street lighting control
- _ Double connector terminal for an easy through wiring to two DALI nodes simultaneously
- _ Colored dots for a quick and failure free assembly (matching with LCO PRE3 and LCO 2 channel outdoor driver terminals)
- _ Compliant with Zhaga Book 18 Ed. 3
- _ UL UV-f1 rated for outdoor use
- _ IK09 high impact resistant

Housing properties

- _ Colour: dark grey (RAL 7043)
- _ Casing receptacle: PBT
- _ Type of protection IP66

Note

- _ Please consider correct placing of the gasket lip in the gasket seat. For details refer to data sheet chapter „Gasket varification“


Interfaces

- _ Supplies Zhaga Book 18 Ed. 3 contact system


Website

<http://www.tridonic.com/28005366>



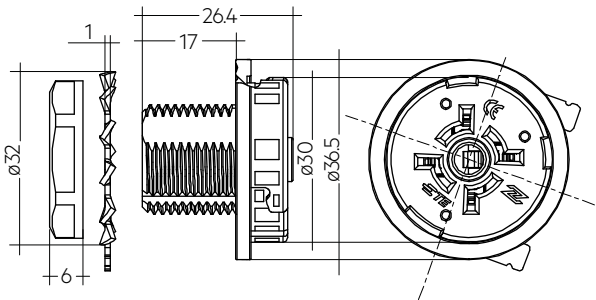

ACU Z18 REP 4PIN G2

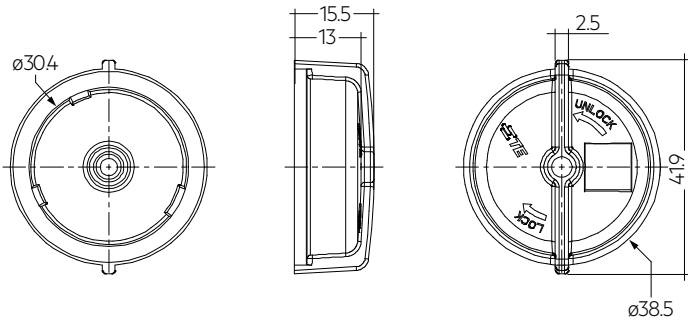

ACU Z18 CAP IP66 G2

Ordering data				
Type	Article number	Packaging, carton	Packaging, bag	Weight per pc.
ACU Z18 REP 4PIN G2	28005366	200 pc(s).	-	0.027 kg
ACU Z18 CAP IP66 G2	28005374	200 pc(s).	100 pieces	0.009 kg

Approval marks



ACU Z18 Set

Accessory

**Product description**

- _ Set consisting of receptacle, lock washer and mounting nut (ACU Z18 REP 4PIN)
- _ Designed for street lighting control
- _ Compliant with Zhaga Book 18 Ed. 3
- _ Optional IP66 with sealing cap (ACU Z18 CAP IP66)
- _ UL UV-f1 rated for outdoor use
- _ Impact protection degree IK09
- _ For more details see data sheet ACU Z18 Set

Housing properties


- _ Colour: dark grey (RAL 7043)
- _ Casing receptacle: PBT
- _ Type of protection IP20

Interfaces

- _ Supplies Zhaga Book 18 Ed. 3 contact system

Website

<http://www.tridonic.com/28003209>

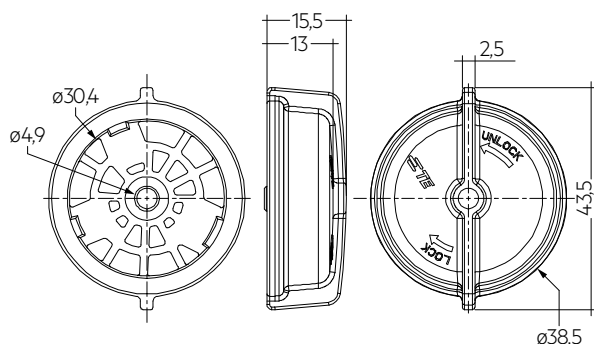**Ordering data**

Type	Article number	Packaging, bag	Weight per pc.
ACU Z18 REP 4PIN	28003209	100 pieces	0.021 kg
ACU Z18 CAP IP66	28003208	100 pieces	0.020 kg

Approval marks

1. Standards

EN 55015
EN 61347-1
EN 61347-2-11
EN 61547
EN 62493
EN 62479
EN 300 328
EN 301 489-1
EN 301 489-17
IEC 62386-101
IEC 62386-103
Part-152
UK 2023
UK 2022
EN 18031-1:2024
EN 18031-2:2024
Zhaga Book 18

1.1 Glow wire test

according to EN 61347-1 passed with 750 °C.

2. Common

The Tridonic LuxSPAN SFI 40 PIR 16DP bDW ZB18 is one of the first motion sensor developed especially to fit factory, storage buildings and warehouses. The LuxSPAN SFI 40 PIR 16DP bDW ZB18 is one of the new generation of Tridonic Bluetooth modules.

The innovative platform design of the sensor enables easy plug and play by supporting the Zhaga Book 18 Ed. 3. The flexible mounting height from 10 – 16 m allows in addition a huge variation of use-cases to be covered. Next to its robust design and long lifetime the IP66 rating complement an excellent protection against harsh environment.

The sensor is powered by a IEC 62386 compatible power supply.

All basicDIM Wireless devices can be controlled with the Tridonic app "4remote BT". The app can be downloaded free of charge from the Apple App Store and Google Play Store.

2.1 Operation

The LuxSPAN SFI 40 PIR 16DP bDW ZB18 is fully compatible with networks which support up to 250 nodes (Evolution networks).

If the module is used with different types of basicDIM Wireless devices in an Evolution network, their compatibility has to be checked before.

Multiple devices automatically form a mesh network that can be controlled from any point. These networks communicate wirelessly directly with the smartphone or tablet. Therefore, an external gateway or wireless LAN network is not needed.


basicDIM Wireless devices can be used very flexible for different use cases. The operating modes (profiles) can be changed in the 4remote BT app.

3. Installation

- The luxSPAN must not be connected to mains. It is supplied directly via the BUS power supply.
- DALI is not SELV. The installation instructions for mains voltage therefore apply.
- Please ensure that the detection ranges of the sensors do not overlap. This may have influence to the light measurement.
- When installed at another height than the recommended installation height, the presence sensor might show different characteristics. When mounted at a higher level, the sensitivity is reduced. If mounted at a lower level, the range is reduced.
- Heat sources located in the detection zone may cause incorrect presence detection.
- luxSPAN is developed to cover the mentioned detection area. Depending on the environment, sensor may also detect objects located outside the mentioned detection area.
- Correct sensor operation can not be guaranteed if operated outside his ta window.
- Make sure the sensor is mounted correctly and locked in place.
- Min. temperature difference between ambient temperature and detected object is $\pm 4^{\circ}\text{C}$. Objects inside this window may not be detected by the sensor.
- Avoid direct illumination of the light source on the sensor including housing.

3.1 Placement

Max. radio range:

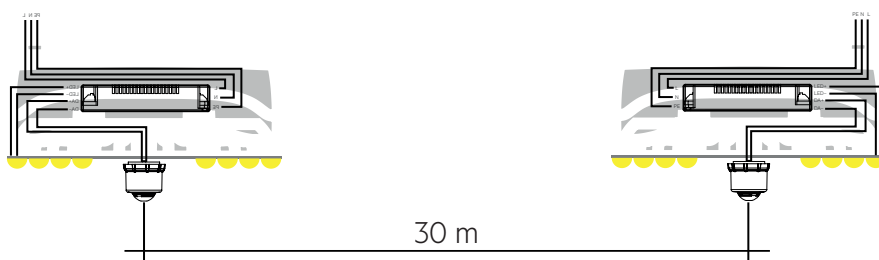

The range of the radio signal depends on the environment, weather conditions, installation height and network mode.




To ensure a good radio connection, do not cover the LuxSPAN with any materials!


3.2 Wiring

For EN 62386-101 Ed. 2 systems:

Wiring diagram with an internal bus supply

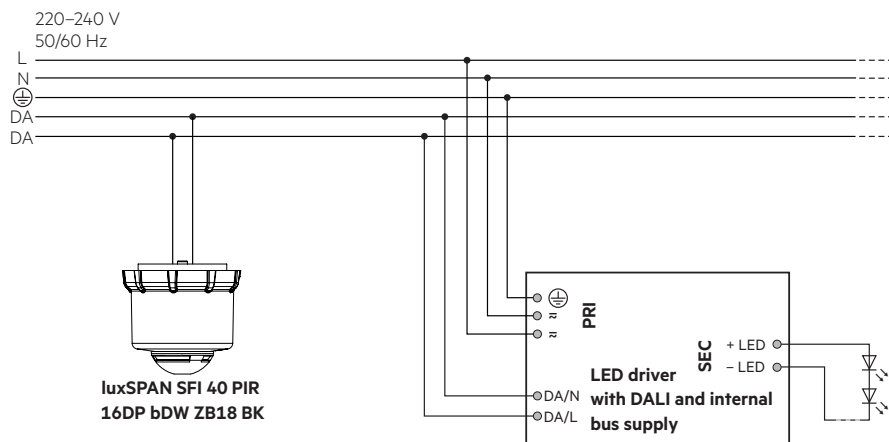

Wiring diagram with an external bus supply

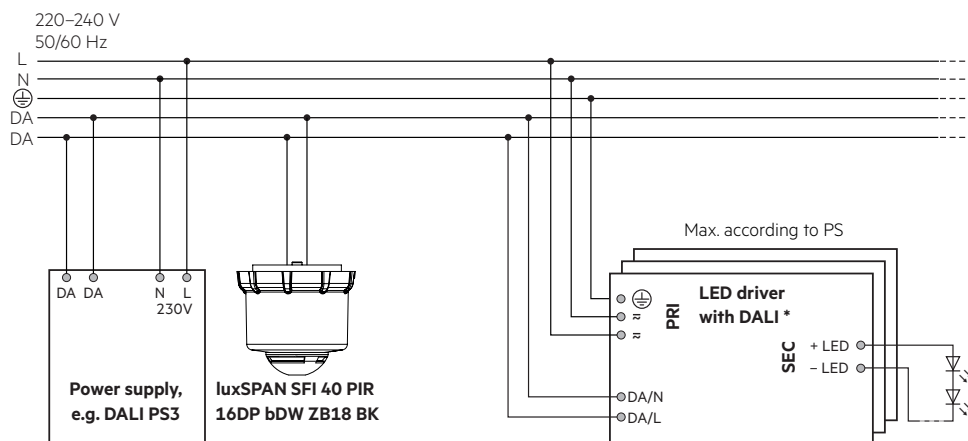


* Max. 4 single / group addresses (A0 ... A3 / G0 ... G3) controllable, depending on the device profile of the basicDIM Wireless module.
The rest of the connected drivers can be controlled via broadcast – depending on the device profile.



Control terminals marked “Caution” can become live in the event of a fault and are therefore not safe to touch. Circuits connected to control terminals marked in this way must be insulated according to the supply voltage of the controlgear and all terminals connected to such circuits must be protected against accidental contact.

System overview:


Following illustration visualizes the wiring of the components inside the luminaire.

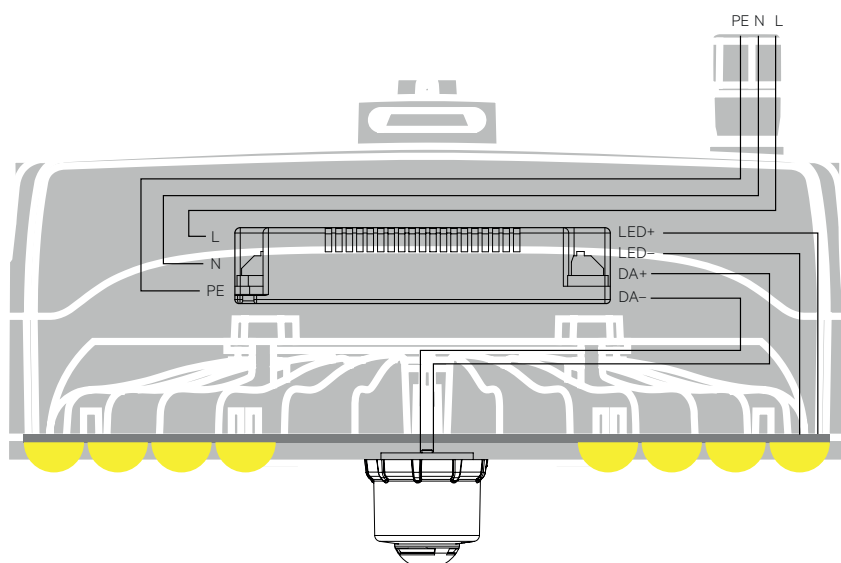

The sensor supports the Zhaga connectivity standard for Plug and Play luminaire extensions. This allows a toolless and flexible integration in luminaires. The connection interface is designed according to Zhaga Book 18 Ed. 3.

Pin assignment LuxSPAN

Pins	Assignment
Pin 1	Not connected
Pin 2*	Negative Pole BUS
Pin 3*	Positive Pole BUS
Pin 4	Not connected

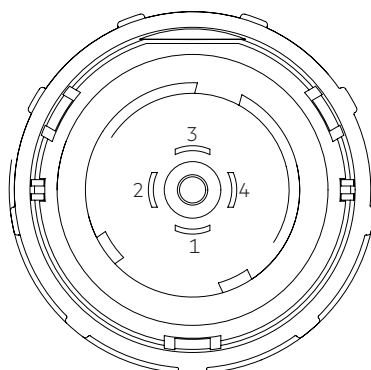


* The polarity is not mandatory for function of the sensor, but is mentioned because the receptacle has to be designed according to Zhaga Book 18 Ed. 3 and inside the luminaire the polarity has to be wired correctly.



The Zhaga connector pins mounted in the luminaire, have to follow the same pin assignment as described in Zhaga Book 18 Ed. 3!


3.3 Mounting instructions

Assembly visualization, see data sheet AZU Z18 Set too:

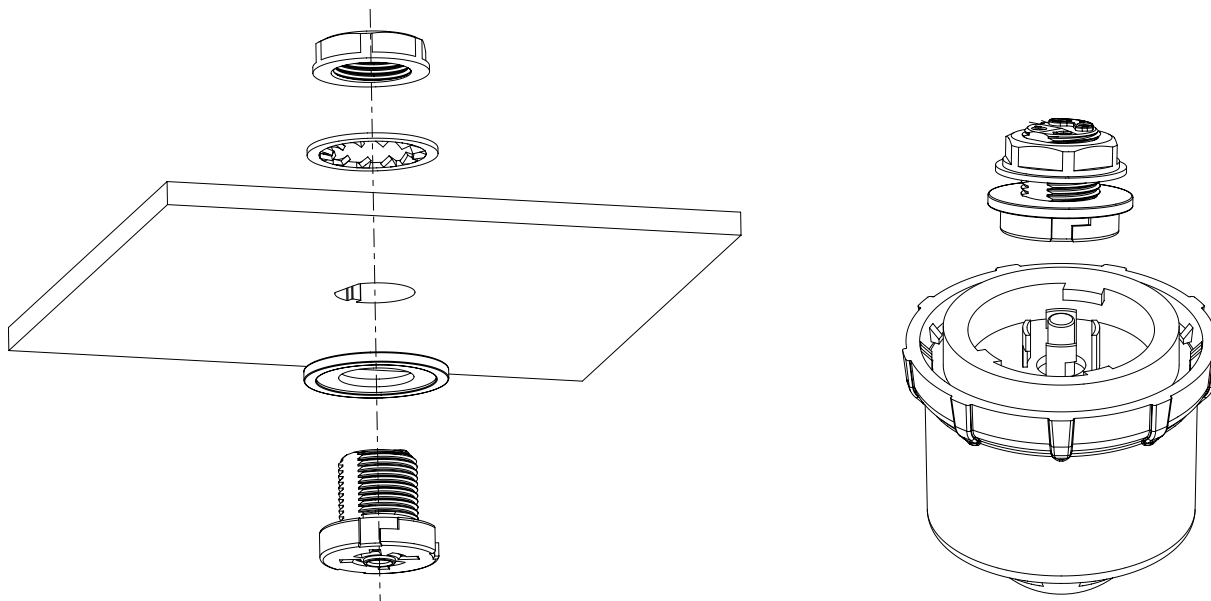

Correct positioning of the gasket is required when assembling the socket. Improper gasket placement may affect sealing and lead to moisture ingress. For further details see datasheet <https://www.tridonic.com/en/int/product/28005366?tab=0>

Installation on luminaire:

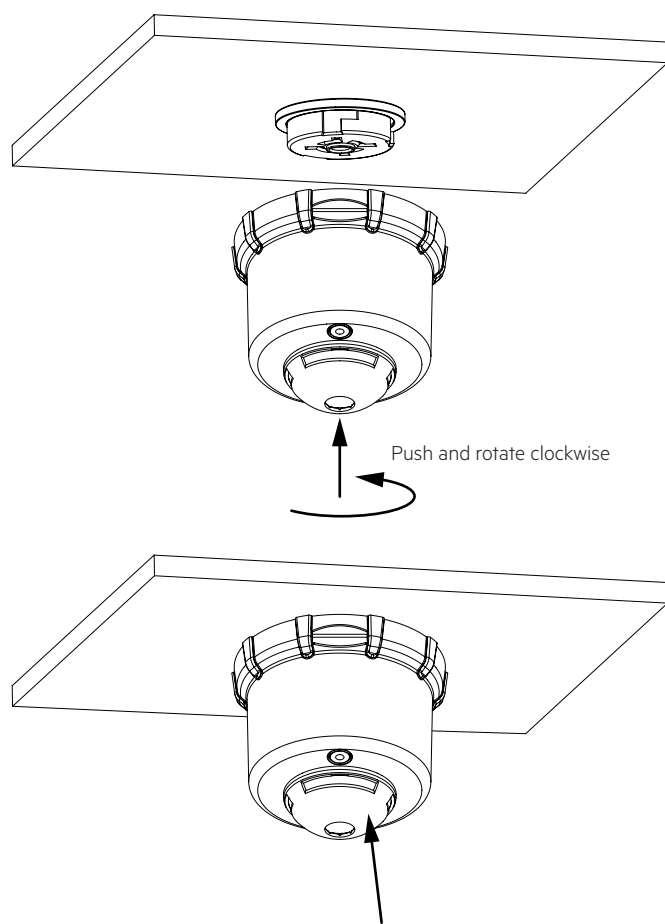

Remove the shutter to adjust coverage of the sensing area.
It can be freely cut as needed or completely removed.



The sensor must lock.

Make sure that the dust and dirt protection, is not bent, no foreign parts between the seal and the fixture housing are located and that the protection fits the fixture.


4. Sensor function

4.1 Occupancy / motion detection

For occupancy detection PIR technology is used. PIR Lens is made to detect moving people in working areas such as warehouses, storage buildings and similar working areas with the following performance criteria:

- Ceiling height from 10 – 16 m
- Movement of human body

4.2 Detection area

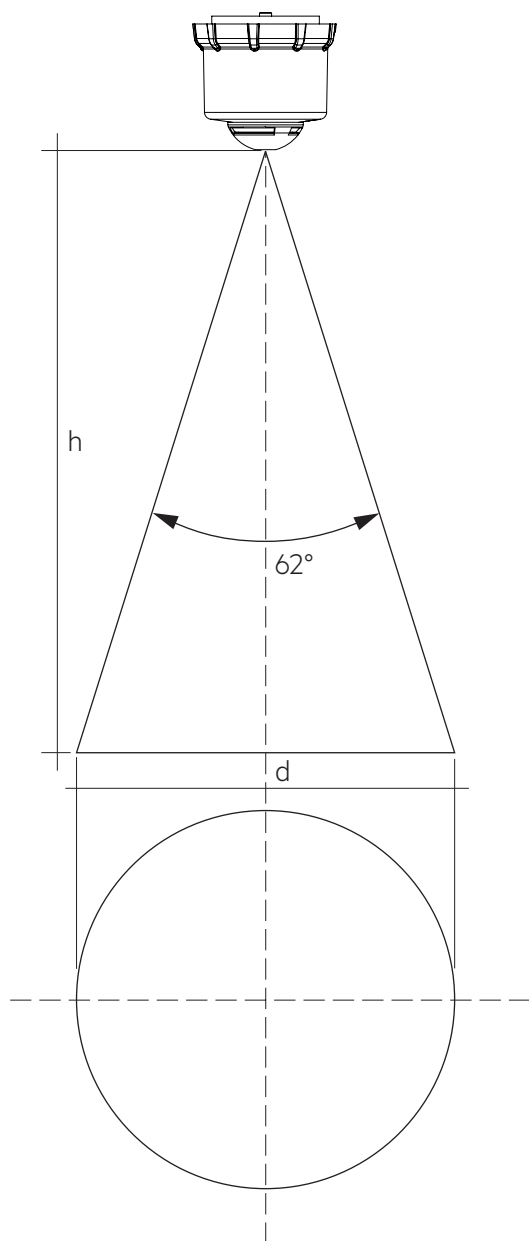

h = Height	d2 = Tangential (62°)
10 m	12.0 m
12 m	14.4 m
14 m	16.8 m
16 m	19.0 m



Reaction time of the sensor (time between occupancy detected and event information send to DALI Bus) is ≤ 25 ms.


The reaction time of the system can be extended by factors such as the amount of data on the bus, the number of connected devices or the control device used (Application Controller).

The point at which the light responds must therefore not be equated with the outer detection range.

4.3 Light measurement

The light measurement is detected in an angle of 24°.

The light sensor is located behind the sensor lens, for that reason, the sensor is not sufficient to be used for constant light control.

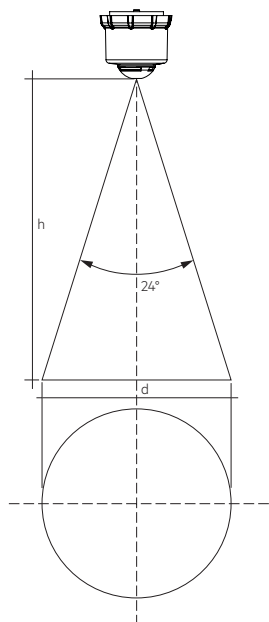

4.4 Status LED

There is a LED built in to indicate different status information to the user.

Event	LED Color
Identify device	Red
Motion detection	Red

5. Miscellaneous

5.1 Disposal of equipment



Return old devices in accordance with the WEEE directive to suitable recycling facilities.

5.2 Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.
No warranty if device was opened.

5.3 Additional information

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Zumtobel Group AG is under license.

Tridonic GmbH & Co. KG is a subsidiary of Zumtobel Group AG.

Wireless Reference Plattform (WRP) is Tridonic's own wireless architecture which is build in this product.

Additional technical information at www.tridonic.com → Technical Data

Lifetime declarations are informative and represent no warranty claim.
No warranty if device was opened.