

**Module LLE 24mm 750lm 927-965 DL PRE**

Modules LLE premium



LLE 24x280mm 750lm DL



LLE 24x560mm 1500lm DL

**Product description**

- \_ Linear Tunable White LED module
- \_ Ideal for linear luminaires
- \_ Push-in terminals for simple and quick wiring
- \_ Design for LEDiL DAISY 7x1 / 28x1 portfolio
- \_ HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output
- \_ Orders only in full carton quantities.
- \_ Long lifetime up to 102,000 hours
- \_ 5 years guarantee (conditions at <https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions>)

**Optical properties**

- \_ Colour temperatures 2,700 K to 6,500 K
- \_ Efficacy up to 200 lm/W
- \_ High colour rendering index CRI > 90
- \_ High colour consistency (MacAdam 3)
- \_ Small luminous flux tolerances

**Mechanical properties**


- \_ Module dimension 24 x 280 mm and 24 x 560 mm
- \_ Simple installation of lens and module with M3 screws

**System solution**

- \_ Integrate compatible partner products into your final system solution:  
<https://www.tridonic.com/en/int/products/accessories#partner>

**Website**

<http://www.tridonic.com/28006218>

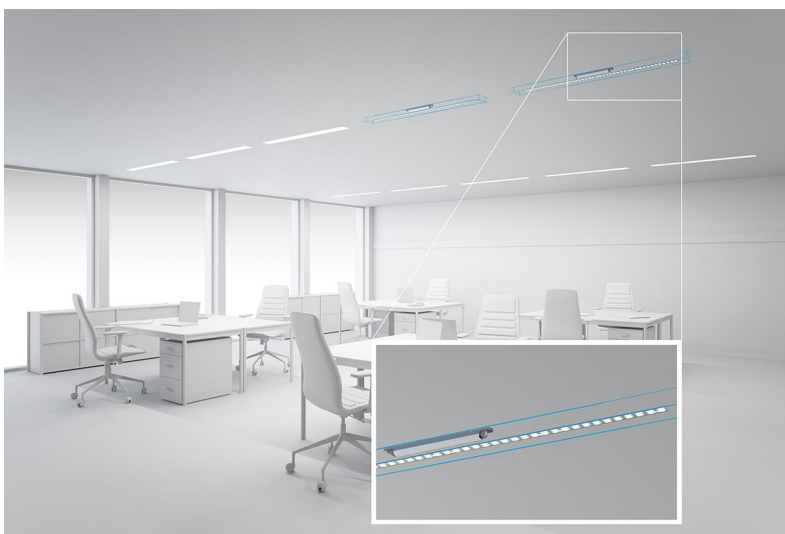

Linear



High bay



Decorative



Downlights



Spotlights



Free-standing



Area




Floor | Wall




Street

**Module LLE 24mm 750lm 927-965 DL PRE**

Modules LLE premium

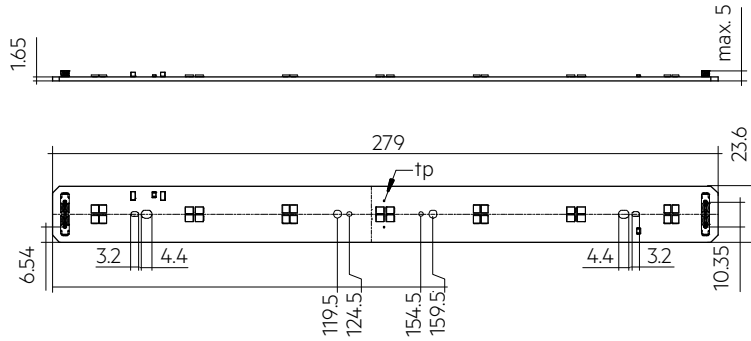

LLE 24x280mm 750lm DL

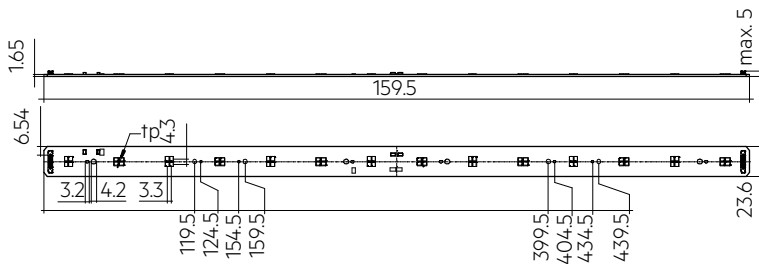

LLE 24x560mm 1500lm DL

**Ordering data**

Type	Article number	Colour temperature	Packaging, carton	Weight per pc.
LLE 24x280mm 750lm 927-965 DL PRE	28006218	2,700 – 6,500 K	108 pc(s).	0.019 kg
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	2,700 – 6,500 K	108 pc(s).	0.037 kg

**Technical data**

Beam characteristic	120°
Ambient temperature $t_a$	-40 ... +65 °C
$t_p$ rated	65 °C
$t_c$	80 °C
Irated for 750 lm <sup>①</sup>	100 mA
Irated for 1,500 lm <sup>①</sup>	200 mA
I <sub>max</sub> for 750 lm <sup>①</sup>	175 mA
I <sub>max</sub> for 1,500 lm <sup>①</sup>	350 mA
Max. permissible LF current ripple for 750 lm <sup>①</sup>	220 mA
Max. permissible LF current ripple for 1,500 lm <sup>①</sup>	440 mA
Max. permissible peak current for 750 lm <sup>①</sup>	300 mA / max. 10 ms
Max. permissible peak current for 1,500 lm <sup>①</sup>	600 mA / max. 10 ms
Max. working voltage for insulation SELV	60 V
Insulation test voltage	0.5 kV
Colour tolerance	3 SDCM
ESD classification	Severity level 4
Risk group (IEC 62471) <sup>②</sup>	RG1
Classification acc. to IEC 62031	Built-in
Type of protection	IPO0
Lumen maintenance L70B50	102,000 h
Guarantee (conditions at <a href="http://www.tridonic.com">www.tridonic.com</a> )	5 Year(s)

**Approval marks****Standards**

IEC 62031, IEC 62471, IEC 61000-4-2, IEC 62778, IEC 61547, UL 8750

## Specific technical data

Type	Article number	Colour temperature	Photometric code	Useful luminous flux <sup>①</sup> at tp = 25 °C	Expected luminous flux at tp rated	Typ. forward current	Min. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption <sup>②</sup> Pon at tp = 25 °C	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
<b>Operating mode NM at 50 mA</b>												
LLE 24x280mm 750lm 927-965 DL PRE	28006218	2,700 K	927/359	370 lm	350 lm	50 mA	35.7 V	38.5 V	1.9 W	195 lm/W	191 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	3,000 K	930/359	-	346 lm	50 mA	35.7 V	38.5 V	-	-	189 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	4,000 K	940/359	-	373 lm	50 mA	35.7 V	38.5 V	-	-	204 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	5,000 K	950/359	-	373 lm	50 mA	35.7 V	38.5 V	-	-	204 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	6,500 K	965/359	-	370 lm	50 mA	35.7 V	38.5 V	-	-	202 lm/W	>90
<b>Operating mode HO at 100 mA</b>												
LLE 24x280mm 750lm 927-965 DL PRE	28006218	2,700 K	927/359	-	692 lm	100 mA	36.7 V	39.5 V	-	-	184 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	3,000 K	930/359	-	685 lm	100 mA	36.7 V	39.5 V	-	-	182 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	4,000 K	940/359	-	738 lm	100 mA	36.7 V	39.5 V	-	-	196 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	5,000 K	950/359	-	738 lm	100 mA	36.7 V	39.5 V	-	-	196 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	6,500 K	965/359	-	731 lm	100 mA	36.7 V	39.5 V	-	-	194 lm/W	>90
<b>Operating mode HO at 150 mA</b>												
LLE 24x280mm 750lm 927-965 DL PRE	28006218	2,700 K	927/359	-	1,016 lm	150 mA	37.5 V	40.4 V	-	-	176 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	3,000 K	930/359	-	1,005 lm	150 mA	37.5 V	40.4 V	-	-	174 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	4,000 K	940/359	-	1,083 lm	150 mA	37.5 V	40.4 V	-	-	188 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	5,000 K	950/359	-	1,083 lm	150 mA	37.5 V	40.4 V	-	-	188 lm/W	>90
LLE 24x280mm 750lm 927-965 DL PRE	28006218	6,500 K	965/359	-	1,073 lm	150 mA	37.5 V	40.4 V	-	-	186 lm/W	>90
<b>Operating mode NM at 100 mA</b>												
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	2,700 K	927/359	740 lm	700 lm	100 mA	35.7 V	38.5 V	3.7 W	200 lm/W	191 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	3,000 K	930/359	-	693 lm	100 mA	35.7 V	38.5 V	-	-	189 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	4,000 K	940/359	-	747 lm	100 mA	35.7 V	38.5 V	-	-	204 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	5,000 K	950/359	-	747 lm	100 mA	35.7 V	38.5 V	-	-	204 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	6,500 K	965/359	-	740 lm	100 mA	35.7 V	38.5 V	-	-	202 lm/W	>90
<b>Operating mode HO at 200 mA</b>												
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	2,700 K	927/359	-	1,384 lm	200 mA	36.7 V	39.5 V	-	-	184 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	3,000 K	930/359	-	1,370 lm	200 mA	36.7 V	39.5 V	-	-	182 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	4,000 K	940/359	-	1,476 lm	200 mA	36.7 V	39.5 V	-	-	196 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	5,000 K	950/359	-	1,476 lm	200 mA	36.7 V	39.5 V	-	-	196 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	6,500 K	965/359	-	1,462 lm	200 mA	36.7 V	39.5 V	-	-	194 lm/W	>90
<b>Operating mode HO at 300 mA</b>												
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	2,700 K	927/359	-	2,031 lm	300 mA	37.5 V	40.4 V	-	-	176 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	3,000 K	930/359	-	2,010 lm	300 mA	37.5 V	40.4 V	-	-	174 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	4,000 K	940/359	-	2,166 lm	300 mA	37.5 V	40.4 V	-	-	188 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	5,000 K	950/359	-	2,166 lm	300 mA	37.5 V	40.4 V	-	-	188 lm/W	>90
LLE 24x560mm 1500lm 927-965 DL PRE	28006225	6,500 K	965/359	-	2,145 lm	300 mA	37.5 V	40.4 V	-	-	186 lm/W	>90

① Values for each channel.

② Measured at operating mode HO.

③ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

## 1. Standards

IEC 62031  
IEC 62471  
IEC 61000-4-2  
IEC 62778  
IEC 61547  
UL 8750

### 1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1 <sup>st</sup> digit	2 <sup>nd</sup> + 3 <sup>rd</sup> digit	4 <sup>th</sup> digit	5 <sup>th</sup> digit	6 <sup>th</sup> digit
Code CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7 70 – 79				Code Luminous flux
8 80 – 89				7 ≥ 70 %
9 ≥90				8 ≥ 80 % 9 ≥ 90 %

### 1.2 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
LLE 24x280mm 750lm 927-965 DL PRE	2,700 K	50 mA	C	2 kWh / 1,000 h
LLE 24x560mm 1500lm 927-965 DL PRE	2,700 K	100 mA	B	4 kWh / 1,000 h

Energy label and further information at [www.tridonic.com](http://www.tridonic.com) in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

## 2. Thermal details

### 2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 65°C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

### 2.2 Storage and humidity

Storage temperature	-40 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

## 2.3 Heat sink values

### LLE 24x280mm 750lm DL PRE

ta	tp	Forward current	R <sub>th, hs-a</sub>	Cooling area
25°C	65°C	100 mA	26.46 K/W	25 cm <sup>2</sup>
25°C	65°C	350 mA	4.75 K/W	140 cm <sup>2</sup>
35°C	65°C	100 mA	19.67 K/W	34 cm <sup>2</sup>
35°C	65°C	350 mA	3.39 K/W	197 cm <sup>2</sup>
40°C	65°C	100 mA	16.27 K/W	41 cm <sup>2</sup>
40°C	65°C	350 mA	2.70 K/W	247 cm <sup>2</sup>
45°C	65°C	100 mA	12.87 K/W	52 cm <sup>2</sup>
45°C	65°C	350 mA	2.02 K/W	330 cm <sup>2</sup>
50°C	65°C	100 mA	9.48 K/W	70 cm <sup>2</sup>
50°C	65°C	350 mA	1.34 K/W	499 cm <sup>2</sup>
55°C	65°C	100 mA	6.08 K/W	110 cm <sup>2</sup>
55°C	65°C	350 mA	0.65 K/W	1,021 cm <sup>2</sup>

### LLE 24x560mm 1500lm DL PRE

ta	tp	Forward current	R <sub>th, hs-a</sub>	Cooling area
25°C	65°C	200 mA	13.31 K/W	50 cm <sup>2</sup>
25°C	65°C	700 mA	2.60 K/W	257 cm <sup>2</sup>
35°C	65°C	200 mA	9.89 K/W	67 cm <sup>2</sup>
35°C	65°C	700 mA	1.86 K/W	358 cm <sup>2</sup>
40°C	65°C	200 mA	8.18 K/W	81 cm <sup>2</sup>
40°C	65°C	700 mA	1.49 K/W	447 cm <sup>2</sup>
45°C	65°C	200 mA	6.48 K/W	103 cm <sup>2</sup>
45°C	65°C	700 mA	1.12 K/W	595 cm <sup>2</sup>
50°C	65°C	200 mA	4.77 K/W	140 cm <sup>2</sup>
50°C	65°C	700 mA	0.75 K/W	887 cm <sup>2</sup>
55°C	65°C	200 mA	3.06 K/W	218 cm <sup>2</sup>
55°C	65°C	700 mA	0.38 K/W	1,746 cm <sup>2</sup>

### Notes

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

### 3. Installation / wiring

#### 3.1 Electrical supply/choice of LED driver

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



LLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the LLE.

With parallel wiring tolerance-related differences in output are possible (thermal stress of the module) and can cause differences in brightness.

If a wire breaks or a complete module fails then the current passing through the other module increases. This may reduce its life considerably.


The max. permissible output current of the LED driver for parallel wiring is 3 A.

LLE have to be operated with SELV LED drivers.




LLE are basic insulated up to 60 V SELV (if mounted with M3 screws in combination with a lens like LEDiL DAISY) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 60 V SELV, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.

3.2 Wiring






Wiring examples

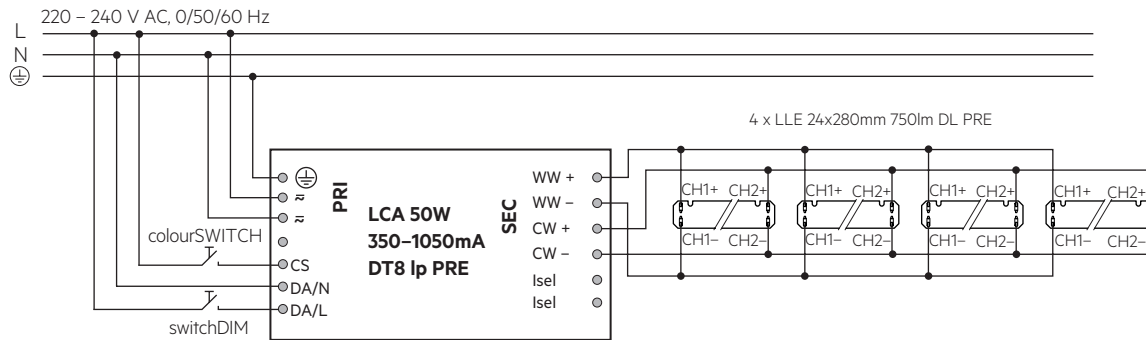



3.3 Wiring type and cross section

For horizontal wiring use stranded wire of 0.5 mm<sup>2</sup> or solid wire from 0.2 to 0.5 mm<sup>2</sup> (stripping length 8 - 9 mm) and for vertical wiring solid wire with 0.5 mm<sup>2</sup> (stripping length > 3 mm). Only one wire per terminal allowed.



Removing the wires through twist and pull.

Cut-out for vertical wiring:

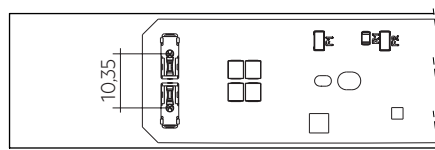

### 3.4 Mounting instruction



None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with M3 rounded head screws.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

### 3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline\_EOS\_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

## 4. Lifetime

### 4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.

L70 means that the LED module will give 70 % of its initial luminous flux.

This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.

In addition the percentage of failed modules (fatal failure) is characterized by the C value.

### 4.2 Lumen maintenance for LLE 24mm DL PRE

LLE 24x280mm DL PRE

Forward current	tp	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
	tempera- ture						
100 mA	55 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h
	80 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h
350 mA	55 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h
	80 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h

LLE 24x560mm DL PRE

Forward current	tp	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
	tempera- ture						
200 mA	55 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h
	80 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h
700 mA	55 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h
	80 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h

L00C03 >102k h. At tp rated and I rated, based on 10 switching cycles per day.

### 4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3

30 s on / 30 s off at I<sub>max</sub>

## 5. Electrical values

### 5.1 Declaration of electrical parameters

I<sub>rated</sub> ... Nominal operating current the module is designed for.


I<sub>max</sub> ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

### 5.2 Typ. forward voltage vs. forward current


LLE 24x280mm 750lm 9xx DL PRE

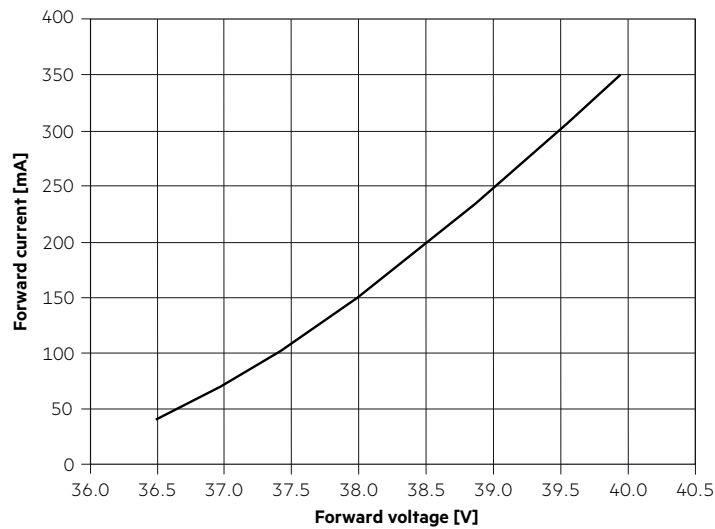

LLE 24x560mm 1500lm 9xx DL PRE

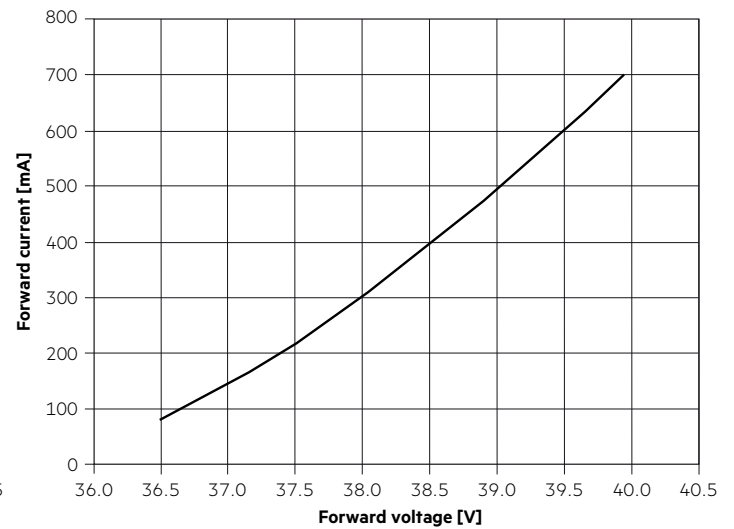

### 5.3 Forward voltage vs. tc temperature

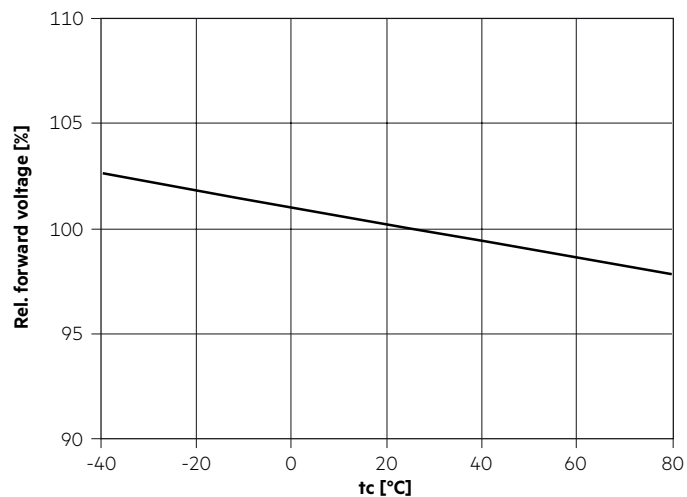

The diagrams are based on statistic values.  
The real values can be different.

## 6. Photometric characteristics

### 6.1 Coordinates and tolerances according to CIE 1931

The specified colour coordinates are measured integral after a settling time of 100 ms. The current impuls depends on the module type.



The ambient temperature of the measurement is  $t_a = 25^\circ\text{C}$ .

The measurement tolerance of the colour coordinates are  $\pm 0.01$ .

Module type	Current impulse
LLE 24x280mm 750lm xxx DL PRE	55 mA
LLE 24x560mm 1500lm xxx DL PRE	110 mA



#### 2,700 K

	x0	y0
Centre	0.4578	0.4101

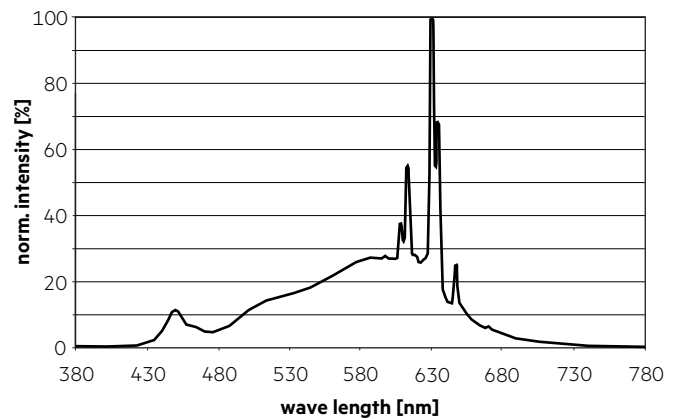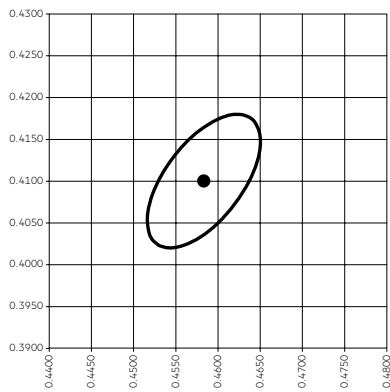


#### 6,500 K

	x0	y0
Centre	0.3123	0.3282

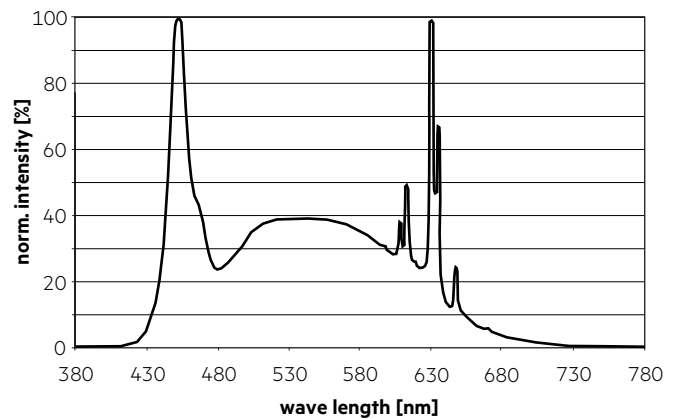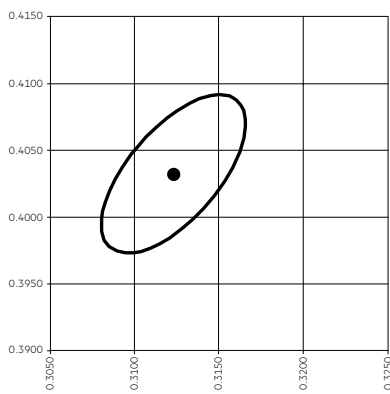


### 6.2 Light distribution

The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

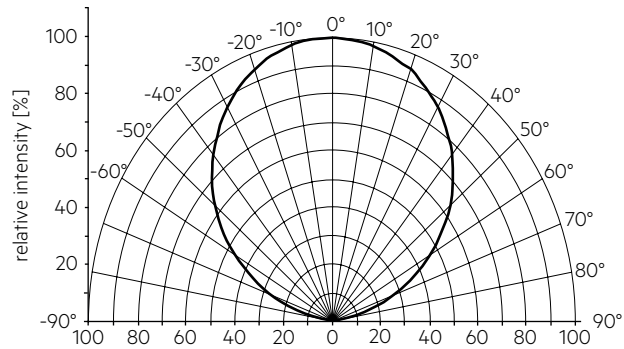


**!** The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 5. To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 4 cm) should be used.

### 6.3 Relative luminous flux vs. tc temperature

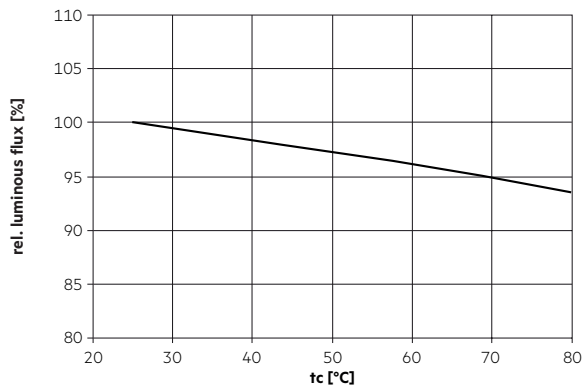


### 6.4 Relative luminous flux vs. operating current

#### LLE 24x280mm DL PRE

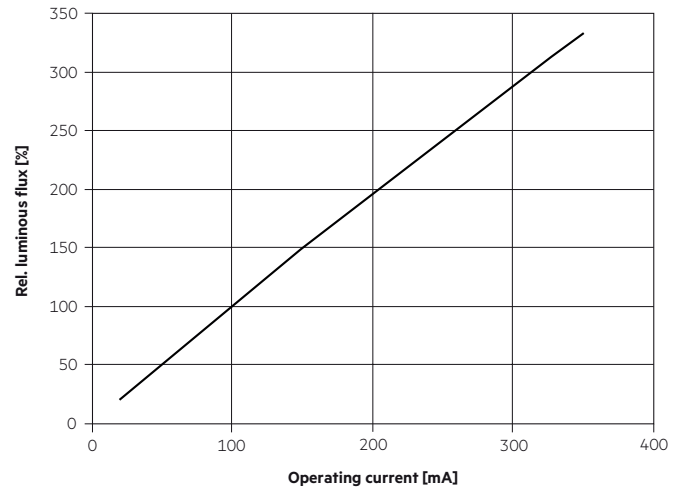

#### LLE 24x560mm DL PRE

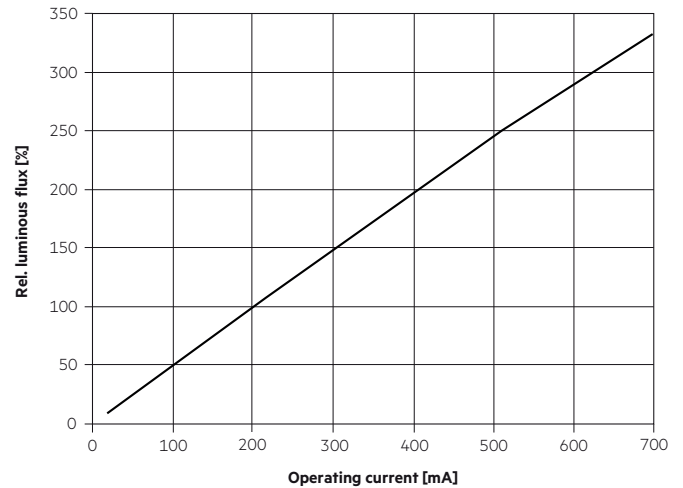

The diagrams are based on statistic values. The real values can be different.

## 7. Miscellaneous

### 7.1 Additional information

Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Guarantee conditions at [www.tridonic.com](http://www.tridonic.com) → Services

Lifetime declarations are informative and represent no warranty claim.