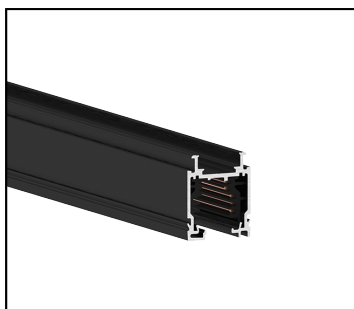


PRODUCT CODE / CODICE PRODOTTO

9100-2/B-CH1

DESCRIPTION / DESCRIZIONE

10 CONDUCTOR + EARTH TRACK FOR SURFACE-MOUNTED/SUSPENDED INSTALLATION

UPPER SECTOR WITH 2 AUXILIARY LINES FOR SELV VOLTAGES

BINARIO A 10 CONDUTTORI + TERRA PER MONTAGGIO A SUPERFICIE/SOSPENSIONE
SETTORE UPPER CON 2 LINEE AUSILIARIE PER TENSIONI SELV

TECHNICAL DATA / DATI TECNICI

Frequency:	50/60Hz (LOWER sector)
Frequency:	
Rated current and voltage:	CLASS III UPPER sector: 10A /60V DC SELV - CLASS I LOWER sector: 16A / 440V - 1A / 50V FELV
Rated current and voltage:	
Load on phase/phases:	UPPER: 600VA (x2) - LOWER: 3,6kVA/10,8kVA
Load on phase/phases:	
Specifications:	UPPER sector: 2 CLASS III circuits (A/B - C/D) 10A / 60V DC SELV LOWER sector: CLASS I L1/L2/L3/N/Earth 16A/440V + D+/D- 1A/50V FELV settore UPPER: 2 circuiti CLASS III (A/B - C/D) 10A/60V DC SELV settore LOWER: CLASS I L1/L2/L3/N/terra 16A/440V + D+/D- 1A/50V FELV
Specifiche:	

FEATURES / CARATTERISTICHE

Materials:	External extruded body in aluminium; Insulated extruded body in PVC; Copper conductors
Materiali:	Estruso esterno in alluminio; Estruso isolante in PVC; Conduttori in rame
Length:	2000 mm
Length:	
Available colours:	Black RAL 9005 embossed
Colori disponibili:	Nero RAL 9005 goffrato
Fastening:	Surface; Suspended
Fissaggio:	A superficie; A sospensione
Weight:	n/a
Peso:	
Max load:	25 kg/m (see assembly instructions)
Carico:	25 Kg/m (vedi istruzioni di montaggio)

Information / Informazioni



Certifications / Certificazioni

