


Starter module (...S...) Continuous module (...C...)

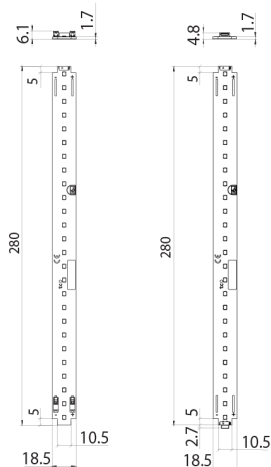

PRODUCT CODE / CODICE PRODOTTO

S-LC190280L26S(C)2790D39 S-LC190280L26S(C)3090D39 S-LC190280L26S(C)3590D39 S-LC190280L26S(C)4090D39

DESCRIPTION / DESCRIZIONE

CONSTANT CURRENT 26 LED MODULE

MODULO 26 LED A CORRENTE COSTANTE

FEATURES / CARATTERISTICHE

SELV modules (Vout < 60V dc)

Moduli SELV (Vout < 60V dc)

26 LED CREE Serie J 2835 3-V

26 LED CREE Serie J 2835 3-V

LED boards require thermal dissipation - Supplied with thermally conductive adhesive

Le schede LED necessitano di dissipazione termica - Fornito con biadesivo termo-conduttivo

Quick-connect terminals

Morsetti a innesto rapido

3MacAdam (3SDCM)

L80 > 50.000 h @ Tc 55°C - 150mA

Information / Informazioni



LED module to be incorporated

Color tolerance:

Tolleranza colore:

Lifetime:

Lifetime:

MODULO 26 LED A CORRENTE COSTANTE CONSTANT CURRENT 26 LED MODULE

Versione Version	Corrente Current	Flusso* Flux*	Efficacia* Efficacy*	Vdc*	Potenza* Power*	CCT	CRI
S-LC190280L26S(C)2790D39	40mA (Min.)	215 lm	153 lm/W	34,8 V dc	1,4 W	2700K	≥90
	400mA (Max)	1836 lm	116 lm/W	39,4 V dc	15,8 W		
S-LC190280L26S(C)3090D39	40mA (Min.)	221 lm	158 lm/W	34,8 V dc	1,4 W	3000K	≥90
	400mA (Max)	1885 lm	120 lm/W	39,4 V dc	15,8 W		
S-LC190280L26S(C)3590D39	40mA (Min.)	229 lm	164 lm/W	34,8 V dc	1,4 W	3500K	≥90
	400mA (Max)	1953 lm	124 lm/W	39,4 V dc	15,8 W		
S-LC190280L26S(C)4090D39	40mA (Min.)	241 lm	172 lm/W	34,8 V dc	1,4 W	4000K	≥90
	400mA (Max)	2054 lm	130 lm/W	39,4 V dc	15,8 W		

* Tc 25°C

Tolleranza: ±7% per flusso e potenza
±5 per CRI

Tolerance: ±7% on flux and power measurements
±5 on CRI measurements

Certifications / Certificazioni

CE

Specifications / Specifiche

T_A Max T_c Beam angle
-25 -55°C 80°C 120°

Standards / Norme

EN 62031 EN 55015
EN 62471 EN 61547
IEC TR 62778 EU 1194/2012
UL 8750

WIRING / WIRING



automatic clamp with 1 hole
serrafilo automatico ad 1 foro



0.5 mm²
20 AWG

Solid conductor section (starter version)
Sezione conduttori solidi (versione starter)



6-7 mm
0,24"-0,28"

Cable stripping
Spelatura cavetti