

**A.A.G. STUCCHI s.r.l. u.s**
Via IV Novembre 30/32
23854 Olginate (LC)
www.aagstucchi.it
info@aagstucchi.it

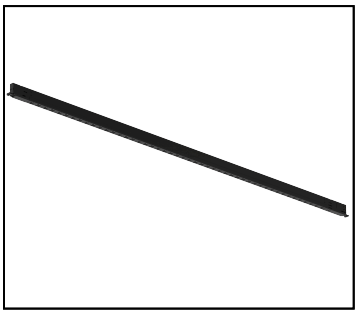

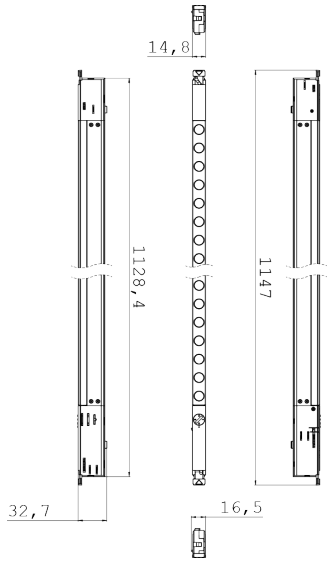


## SENZAFINE HE MAIN VOLTAGE LENS / *SENZAFINE HE MAIN VOLTAGE LENS*

**PRODUCT CODE /** *CODICE PRODOTTO*

## M141000/B8-E-2-MV

**DESCRIPTION /** *DESCRIZIONE*

230V linear light module. For 9000/9000A ONETRACK™ range tracks. PMMA Lens 56°. Polycarbonate cover. L(mm): 1128.

*230V linear light module. For 9000/9000A ONETRACK™ range tracks. PMMA Lens 56°. Polycarbonate cover. L(mm): 1128.*


**TECHNICAL DATA /** *DATI TECNICI*


| | |
|---|---|
| **Application** | ON TRACK |
| **Real Flux(lm)** | 2042.47 |
| **Nominal Flux(lm)** | 2591.5 |
| **Real Power(W)** | 13 |
| **Efficiency(lm / W)** | 86.5 |
| **LED source** | LED |
| **Colour Temperature(K)** | 2700 |
| **CRI** | 90 |
| **MacAdam** | ≤ 3 |
| **Beam Angle** | 54,8°x54,6° |

**UGR**

| | | |
|---|---|---|
| <19 | X=4H Y=8H | S=0.25H |
| | Reflection factors: | 70/50/20 |
| | UGR transversal: | 17.5 |
| | UGR axial: | 17.4 |

| | |
|---|---|
| **Lifetime(Khr)** | >60Khr L90B5 |
| **Driver** | DALI 2 |
| **VF** | ~ 33 |
| **I LED(mA)** | 600mA |
| **L(mm)** | 1128 |
| **Weight(g)** | 430 |
| **Materials** | Aluminium body + PMMA lenses + polycarbonate covers |
| **Colour** | Nero |
| **Mounting** | Mechanical |
| **Packaging** | Cardboard box |

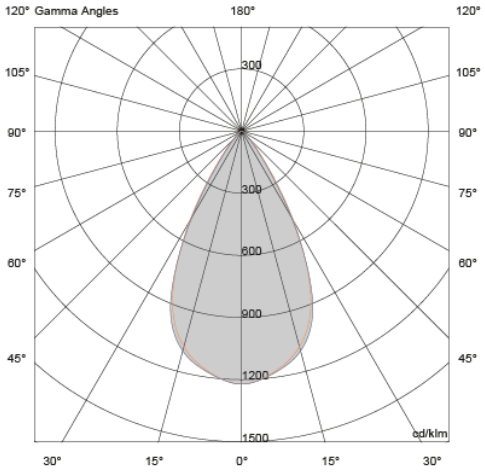

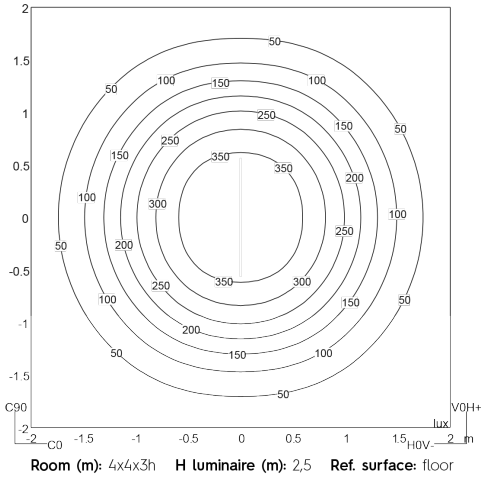
Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor

**Certifications /** *Certificazioni*

**Technical info /** *Info tecniche*

220..240Vac 50..60Hz | IP20 | RG1 unlimited

Other colour temperatures and CRI available upon request. All values marked with an (*) are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.
Luminous flux is subject to a normal technology drop over time. A.A.G. Stucchi reserves the right to make technical changes without prior notice. Real power: ±10% tolerance

*Other colour temperatures and CRI available upon request. All values marked with an (*) are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.*
*Luminous flux is subject to a normal technology drop over time. A.A.G. Stucchi reserves the right to make technical changes without prior notice. Real power: ±10% tolerance*