TRIDONIC

Module LLE 16mm 1250lm CRI90 HV ADV6

Modules LLE advanced



LLE 16x70mm 325lm HV ADV6



LLE 16x140mm 650lm HV ADV6



LLE 16x280mm 1250lm HV ADV6

Product description

_ Ideal for compact linear luminaires designs
_ Homogenous illumination thanks to small package distance
_ 2 terminals for serial wiring
_ Perfectly uniform light, even if several LED modules are used together in a line
_ Push terminals for quick and simple wiring of LED module to LED module
_ Min. order quantity LLE 16x70mm QTY4: 36 pcs. The LLE 16x70mm QTY4 module contains 4 single 16x70mm modules which have to be separated.
_ HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output
_ Long lifetime up to 102,000 hours
_ 5 years guarantee (conditions at https://www.tridonic.com/en/int/services/manufacturer-guarantee-conditions)

Optical properties

_ Colour temperatures 2,700, 3,000, 3,500 and 4,000 K
_ Efficacy of the LED module 173 lm/W at Irated and tp = 25 °C
_ High colour rendering index CRI > 90
_ High colour consistency (MacAdam 3) ①
_ Small luminous flux tolerances

Mechanical properties


_ Module dimension 16 x 70 mm, 16 x 140 mm, 16 x 280 mm and 16 x 560 mm
_ Simple installation via clips or screws

System solution

_ Integrate compatible partner products into your final system solution: https://www.tridonic.com/en/int/products/accessories#partner
_ Combine Tridonic's LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via https://setbuilder.tridonic.com/)

① Integral measurement over the complete module.

Website
http://www.tridonic.com/28004982

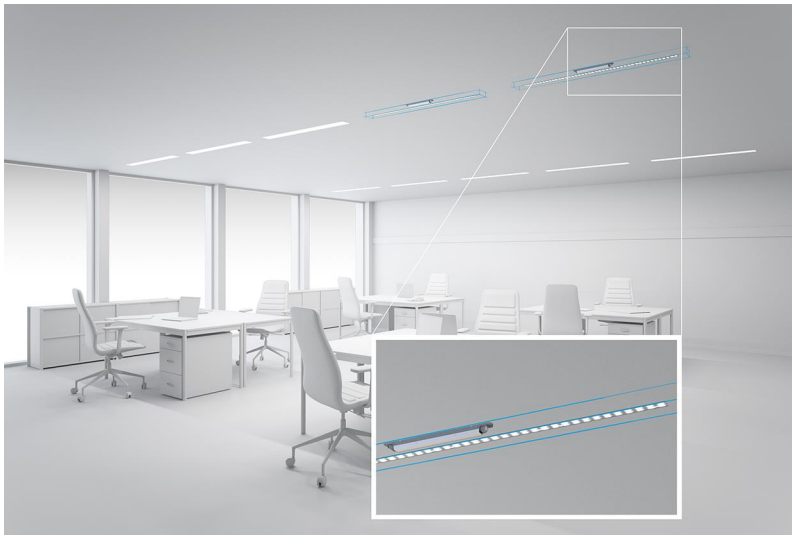


Linear | High bay | Decorative | Downlights | Spotlights | Free-standing | Area | Floor | Wall | Street


TRIDONIC

Module LLE 16mm 1250lm CRI90 HV ADV6


Modules LLE advanced

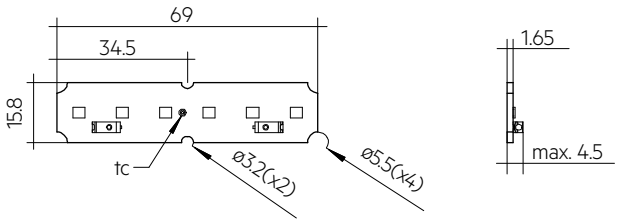


LLE 16x70mm 325lm HV ADV6

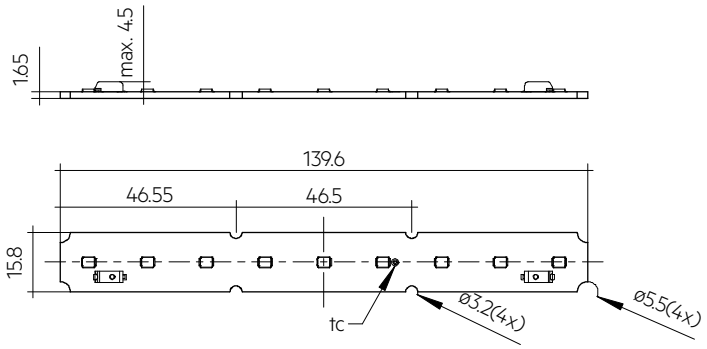

LLE 16x140mm 650lm HV ADV6

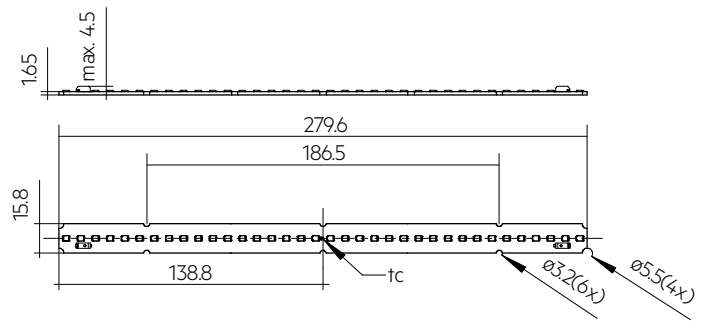

LLE 16x280mm 1250lm HV ADV6

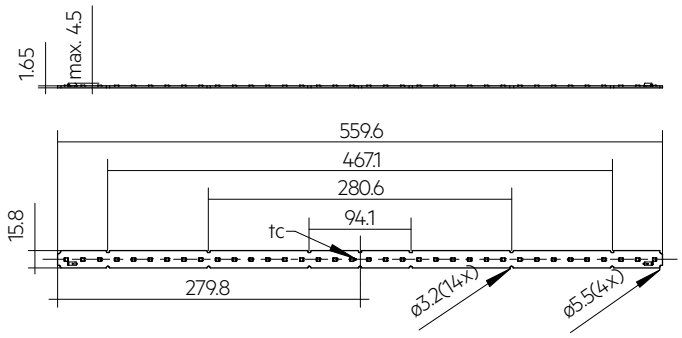

LLE 16x560mm 2400lm HV ADV6

Ordering data

Type	Article number	Colour temperature	Packaging, carton	Weight per pc.
LLE 16x70mm 325lm 930 HV ADV6 QTY4	**28004982**	3,000 K	144 pc(s).	0.017 kg
LLE 16x70mm 325lm 940 HV ADV6 QTY4	**28004983**	4,000 K	144 pc(s).	0.017 kg
LLE 16x140mm 650lm 927 HV ADV6	**28004994**	2,700 K	144 pc(s).	0.007 kg
LLE 16x140mm 650lm 930 HV ADV6	**28004995**	3,000 K	144 pc(s).	0.007 kg
LLE 16x140mm 650lm 935 HV ADV6	**28004996**	3,500 K	144 pc(s).	0.007 kg
LLE 16x140mm 650lm 940 HV ADV6	**28004997**	4,000 K	144 pc(s).	0.007 kg
LLE 16x280mm 1250lm 927 HV ADV6	**28005006**	2,700 K	144 pc(s).	0.014 kg
LLE 16x280mm 1250lm 930 HV ADV6	**28005007**	3,000 K	144 pc(s).	0.014 kg
LLE 16x280mm 1250lm 935 HV ADV6	**28005008**	3,500 K	144 pc(s).	0.014 kg
LLE 16x280mm 1250lm 940 HV ADV6	**28005009**	4,000 K	144 pc(s).	0.014 kg
LLE 16x560mm 2400lm 927 HV ADV6	**28005016**	2,700 K	144 pc(s).	0.028 kg
LLE 16x560mm 2400lm 930 HV ADV6	**28005017**	3,000 K	144 pc(s).	0.028 kg
LLE 16x560mm 2400lm 935 HV ADV6	**28005018**	3,500 K	144 pc(s).	0.028 kg
LLE 16x560mm 2400lm 940 HV ADV6	**28005019**	4,000 K	144 pc(s).	0.028 kg

Technical data

Beam characteristic	360°
Ambient temperature ta	-40 … +65 °C
tp rated	50 °C
tc	85 °C
Irated	275 mA
Imax	700 mA
Max. permissible LF current ripple	800 mA
Max. permissible peak current	1,350 mA / max. 10 ms
Max. working voltage for insulation ②	440 V
Insulation test voltage	1.88 kV
Colour tolerance	3 SDCM
ESD classification	Severity level 2
Risk group (IEC 62471)	RG1 (> 280 – 700 mA (Imax)), RGO (≤ 280 mA)
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	102,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)

Approval marks

RoHS

Standards

IEC 62031, IEC 62471, IEC 61000-4-2, IEC 62778, IEC 61547

Specific technical data

Type	Article number	Photometric code[3]	Useful luminous flux at tp = 25 °C [4]	Expected luminous flux[5] at tp rated	Typ. forward current	Min. forward voltage at tp rated	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C [6]	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
Operating mode HE											
LLE 16x70mm 325lm 930 HV ADV6 QTY4	**28004982**	930/359	–	89 lm	100 mA	5.0 V	5.5 V	–	–	169 lm/W	>90
LLE 16x70mm 325lm 940 HV ADV6 QTY4	**28004983**	940/359	–	93 lm	100 mA	5.0 V	5.5 V	–	–	175 lm/W	>90
LLE 16x140mm 650lm 927 HV ADV6	**28004994**	927/359	–	173 lm	100 mA	10.1 V	11.0 V	–	–	164 lm/W	>90
LLE 16x140mm 650lm 930 HV ADV6	**28004995**	930/359	–	178 lm	100 mA	10.1 V	11.0 V	–	–	169 lm/W	>90
LLE 16x140mm 650lm 935 HV ADV6	**28004996**	935/359	–	183 lm	100 mA	10.1 V	11.0 V	–	–	173 lm/W	>90
LLE 16x140mm 650lm 940 HV ADV6	**28004997**	940/359	–	185 lm	100 mA	10.1 V	11.0 V	–	–	175 lm/W	>90
LLE 16x280mm 1250lm 927 HV ADV6	**28005006**	927/359	–	346 lm	100 mA	20.2 V	22.0 V	–	–	164 lm/W	>90
LLE 16x280mm 1250lm 930 HV ADV6	**28005007**	930/359	–	356 lm	100 mA	20.2 V	22.0 V	–	–	169 lm/W	>90
LLE 16x280mm 1250lm 935 HV ADV6	**28005008**	935/359	–	366 lm	100 mA	20.2 V	22.0 V	–	–	173 lm/W	>90
LLE 16x280mm 1250lm 940 HV ADV6	**28005009**	940/359	–	370 lm	100 mA	20.2 V	22.0 V	–	–	175 lm/W	>90
LLE 16x560mm 2400lm 927 HV ADV6	**28005016**	927/359	–	691 lm	100 mA	40.3 V	43.9 V	–	–	164 lm/W	>90
LLE 16x560mm 2400lm 930 HV ADV6	**28005017**	930/359	–	712 lm	100 mA	40.3 V	43.9 V	–	–	169 lm/W	>90
LLE 16x560mm 2400lm 935 HV ADV6	**28005018**	935/359	–	731 lm	100 mA	40.3 V	43.9 V	–	–	173 lm/W	>90
LLE 16x560mm 2400lm 940 HV ADV6	**28005019**	940/359	–	741 lm	100 mA	40.3 V	43.9 V	–	–	175 lm/W	>90
Operating mode NM											
LLE 16x70mm 325lm 930 HV ADV6 QTY4	**28004982**	930/359	250 lm	240 lm	275 mA	5.2 V	5.7 V	1.5 W	165 lm/W	160 lm/W	>90
LLE 16x70mm 325lm 940 HV ADV6 QTY4	**28004983**	940/359	260 lm	250 lm	275 mA	5.2 V	5.7 V	1.5 W	172 lm/W	166 lm/W	>90
LLE 16x140mm 650lm 927 HV ADV6	**28004994**	927/359	486 lm	466 lm	275 mA	10.4 V	11.4 V	3.0 W	160 lm/W	155 lm/W	>90
LLE 16x140mm 650lm 930 HV ADV6	**28004995**	930/359	501 lm	480 lm	275 mA	10.4 V	11.4 V	3.0 W	165 lm/W	160 lm/W	>90
LLE 16x140mm 650lm 935 HV ADV6	**28004996**	935/359	514 lm	493 lm	275 mA	10.4 V	11.4 V	3.0 W	169 lm/W	164 lm/W	>90
LLE 16x140mm 650lm 940 HV ADV6	**28004997**	940/359	520 lm	499 lm	275 mA	10.4 V	11.4 V	3.0 W	172 lm/W	166 lm/W	>90
LLE 16x280mm 1250lm 927 HV ADV6	**28005006**	927/359	971 lm	932 lm	275 mA	20.9 V	22.7 V	6.1 W	160 lm/W	155 lm/W	>90
LLE 16x280mm 1250lm 930 HV ADV6	**28005007**	930/359	1,001 lm	961 lm	275 mA	20.9 V	22.7 V	6.1 W	165 lm/W	160 lm/W	>90
LLE 16x280mm 1250lm 935 HV ADV6	**28005008**	935/359	1,028 lm	986 lm	275 mA	20.9 V	22.7 V	6.1 W	169 lm/W	164 lm/W	>90
LLE 16x280mm 1250lm 940 HV ADV6	**28005009**	940/359	1,041 lm	999 lm	275 mA	20.9 V	22.7 V	6.1 W	172 lm/W	166 lm/W	>90
LLE 16x560mm 2400lm 927 HV ADV6	**28005016**	927/359	1,942 lm	1,864 lm	275 mA	41.8 V	45.4 V	12.1 W	160 lm/W	155 lm/W	>90
LLE 16x560mm 2400lm 930 HV ADV6	**28005017**	930/359	2,002 lm	1,921 lm	275 mA	41.8 V	45.4 V	12.1 W	165 lm/W	160 lm/W	>90
LLE 16x560mm 2400lm 935 HV ADV6	**28005018**	935/359	2,055 lm	1,972 lm	275 mA	41.8 V	45.4 V	12.1 W	169 lm/W	164 lm/W	>90
LLE 16x560mm 2400lm 940 HV ADV6	**28005019**	940/359	2,082 lm	1,998 lm	275 mA	41.8 V	45.4 V	12.1 W	172 lm/W	166 lm/W	>90
Operating mode HO											
LLE 16x70mm 325lm 930 HV ADV6 QTY4	**28004982**	930/359	–	499 lm	600 mA	5.5 V	5.9 V	–	–	145 lm/W	>90
LLE 16x70mm 325lm 940 HV ADV6 QTY4	**28004983**	940/359	–	519 lm	600 mA	5.5 V	5.9 V	–	–	151 lm/W	>90
LLE 16x140mm 650lm 927 HV ADV6	**28004994**	927/359	–	968 lm	600 mA	11.0 V	11.9 V	–	–	141 lm/W	>90
LLE 16x140mm 650lm 930 HV ADV6	**28004995**	930/359	–	998 lm	600 mA	11.0 V	11.9 V	–	–	145 lm/W	>90
LLE 16x140mm 650lm 935 HV ADV6	**28004996**	935/359	–	1,024 lm	600 mA	11.0 V	11.9 V	–	–	149 lm/W	>90
LLE 16x140mm 650lm 940 HV ADV6	**28004997**	940/359	–	1,038 lm	600 mA	11.0 V	11.9 V	–	–	151 lm/W	>90
LLE 16x280mm 1250lm 927 HV ADV6	**28005006**	927/359	–	1,936 lm	600 mA	21.9 V	23.8 V	–	–	141 lm/W	>90
LLE 16x280mm 1250lm 930 HV ADV6	**28005007**	930/359	–	1,996 lm	600 mA	21.9 V	23.8 V	–	–	145 lm/W	>90
LLE 16x280mm 1250lm 935 HV ADV6	**28005008**	935/359	–	2,049 lm	600 mA	21.9 V	23.8 V	–	–	149 lm/W	>90
LLE 16x280mm 1250lm 940 HV ADV6	**28005009**	940/359	–	2,075 lm	600 mA	21.9 V	23.8 V	–	–	151 lm/W	>90
LLE 16x560mm 2400lm 927 HV ADV6	**28005016**	927/359	–	3,873 lm	600 mA	43.9 V	47.5 V	–	–	141 lm/W	>90
LLE 16x560mm 2400lm 930 HV ADV6	**28005017**	930/359	–	3,991 lm	600 mA	43.9 V	47.5 V	–	–	145 lm/W	>90
LLE 16x560mm 2400lm 935 HV ADV6	**28005018**	935/359	–	4,097 lm	600 mA	43.9 V	47.5 V	–	–	149 lm/W	>90
LLE 16x560mm 2400lm 940 HV ADV6	**28005019**	940/359	–	4,150 lm	600 mA	43.9 V	47.5 V	–	–	151 lm/W	>90

② If mounted with M3 screws with 6 mm head diameter and plastic washer.
③ The detailed explanation, see data sheet section 1.1.
④ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.
⑤ Measurement uncertainty ± 10 %. Based on calculation.
⑥ Tolerance of power consumption Pon ± 10 %. Measurement uncertainty ± 5 %.


ACL BRIDGE LLE16

Accessory



Product description
_ Clip for fixation for LLE16
_ Fast snap on mounting (for sheet thickness 0.5 – 1.0 mm)
_ For drilling hole 3 mm
_ Clip made of polycarbonate
_ Minimum sales quantity 200 pcs.

Website
http://www.tridonic.com/28001035

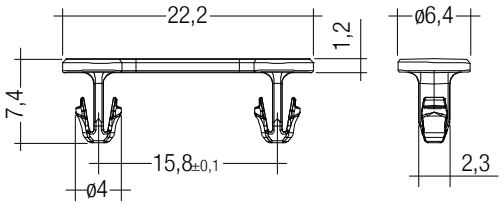

Ordering data

Type	Article number	Colour	Packaging, bag	Weight per pc.
ACL BRIDGE LLE16 PUSH-FIX	**28001035**	White	200 pc(s).	0.001 kg

ACL LINEAR COVER 16mm


Accessory

Product description

_ LINEAR COVER for LLE 16
_ Protection against direct touch for non-SELV applications (recommendation: use all fixing points) ①
_ Fast snap on mounting on to LLE 16 with clips or plastic washers
_ High transmission: transparent, semi-transparent and diffuse
_ Linear lense made of PMMA
_ Tolerances LINEAR COVER: + 10 mm for 1,600 / 1,200 mm length (ends raw)

① Ends must be covered by the luminaire construction.

Website
http://www.tridonic.com/28000950

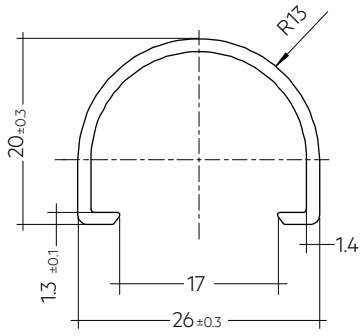

Ordering data

Type	Article number	Colour	Length L	Packaging, carton	Weight per pc.
ACL LINEAR COVER 16x1600mm FROSTED	**28000950**	Semi-transparent	1,600 mm	24 pc(s).	0.147 kg
ACL LINEAR COVER 16x1200mm FROSTED	**28002827**	Semi-transparent	1,200 mm	24 pc(s).	0.100 kg
ACL LINEAR COVER 16x1600mm DIFFUSE	**28000951**	Diffuse	1,600 mm	24 pc(s).	0.147 kg
ACL LINEAR COVER 16x1200mm DIFFUSE	**28002828**	Diffuse	1,200 mm	24 pc(s).	0.100 kg

1. Standards

IEC 62031
IEC 62471
IEC 61000-4-2
IEC 62778
IEC 61547

1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1st digit		2nd + 3rd digit	4th digit	5th digit	6th digit	
Code	CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)	
					Code	Luminous flux
7	70 – 79				7	≥ 70 %
8	80 – 89				8	≥ 80 %
9	≥90				9	≥ 90 %

1.2 Risk group

Forward current	Risk group (IEC 62471)
≤ 280 mA	RG0
> 280 – 700 mA (Imax)	RG1

1.3 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
LLE 16x70mm 325lm 930 HV ADV6 QTY4	3,000 K	275 mA	D	2 kWh / 1,000 h
LLE 16x70mm 325lm 940 HV ADV6 QTY4	4,000 K	275 mA	C	2 kWh / 1,000 h
LLE 16x140mm 650lm 927 HV ADV6	2,700 K	275 mA	D	4 kWh / 1,000 h
LLE 16x140mm 650lm 930 HV ADV6	3,000 K	275 mA	D	4 kWh / 1,000 h
LLE 16x140mm 650lm 935 HV ADV6	3,500 K	275 mA	D	4 kWh / 1,000 h
LLE 16x140mm 650lm 940 HV ADV6	4,000 K	275 mA	C	4 kWh / 1,000 h
LLE 16x280mm 1250lm 927 HV ADV6	2,700 K	275 mA	D	7 kWh / 1,000 h
LLE 16x280mm 1250lm 930 HV ADV6	3,000 K	275 mA	D	7 kWh / 1,000 h
LLE 16x280mm 1250lm 935 HV ADV6	3,500 K	275 mA	D	7 kWh / 1,000 h
LLE 16x280mm 1250lm 940 HV ADV6	4,000 K	275 mA	D	7 kWh / 1,000 h
LLE 16x560mm 2400lm 927 HV ADV6	2,700 K	275 mA	D	13 kWh / 1,000 h
LLE 16x560mm 2400lm 930 HV ADV6	3,000 K	275 mA	D	13 kWh / 1,000 h
LLE 16x560mm 2400lm 935 HV ADV6	3,500 K	275 mA	C	13 kWh / 1,000 h
LLE 16x560mm 2400lm 940 HV ADV6	4,000 K	275 mA	D	13 kWh / 1,000 h

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base https://eprel.ec.europa.eu/

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For LLE a tp temperature of 50 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-40 … +85 °C

Operation only in non condensing environment.
Humidity during processing of the module should be between 30 to 70 %.

2.3 Heat sink values

LLE 16x70mm 325lm ADV6

ta	tp	Forward current	$R_{th, hs-a}$	Cooling area
25 °C	50 °C	275 mA	37.75 K/W	18 cm²
25 °C	50 °C	600 mA	9.59 K/W	70 cm²
35 °C	50 °C	275 mA	20.94 K/W	32 cm²
35 °C	50 °C	600 mA	4.04 K/W	165 cm²
40 °C	50 °C	275 mA	12.53 K/W	53 cm²
40 °C	50 °C	600 mA	1.26 K/W	528 cm²
45 °C	50 °C	275 mA	4.12 K/W	162 cm²

LLE 16x140mm 650lm ADV6

ta	tp	Forward current	$R_{th, hs-a}$	Cooling area
25 °C	50 °C	275 mA	18.88 K/W	35 cm²
25 °C	50 °C	600 mA	4.79 K/W	139 cm²
35 °C	50 °C	275 mA	10.47 K/W	64 cm²
35 °C	50 °C	600 mA	2.02 K/W	330 cm²
40 °C	50 °C	275 mA	6.26 K/W	106 cm²
40 °C	50 °C	600 mA	0.63 K/W	1056 cm²
45 °C	50 °C	275 mA	2.06 K/W	324 cm²

LLE 16x280mm 1250lm ADV6

ta	tp	Forward current	$R_{th, hs-a}$	Cooling area
25 °C	50 °C	275 mA	9.44 K/W	71 cm²
25 °C	50 °C	600 mA	2.40 K/W	278 cm²
35 °C	50 °C	275 mA	5.23 K/W	127 cm²
35 °C	50 °C	600 mA	1.01 K/W	661 cm²
40 °C	50 °C	275 mA	3.13 K/W	213 cm²
40 °C	50 °C	600 mA	0.32 K/W	2,111 cm²
45 °C	50 °C	275 mA	1.03 K/W	647 cm²

LLE 16x560mm 2400lm ADV6

ta	tp	Forward current	$R_{th, hs-a}$	Cooling area
25 °C	50 °C	275 mA	4.72 K/W	141 cm²
25 °C	50 °C	600 mA	1.20 K/W	556 cm²
35 °C	50 °C	275 mA	2.62 K/W	255 cm²
35 °C	50 °C	600 mA	0.50 K/W	1,321 cm²
40 °C	50 °C	275 mA	1.57 K/W	426 cm²
40 °C	50 °C	600 mA	0.16 K/W	4,223 cm²
45 °C	50 °C	275 mA	0.52 K/W	1,294 cm²

Notes
The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

For applications with a small distance between LED module and lens or operating currents higher than 500 mA, screw mounting is recommended to ensure a reliable thermal connection between LED module and cooling surface.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:
- Short-circuit protection
- Overload protection
- Overtemperature protection

LLE modules must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.


Wrong polarity can damage the LLE.

The LLE module is designed for serial wiring.


LLE can be operated either from SELV LED drivers or from LED drivers with LV output voltage.

LLE are basic insulated up to 440 V (if mounted with M3 screws with head diameter 6 mm in combination with plastic washers) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED driver (also against earth) is above 440 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.
At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.


3.2 Wiring



Wiring examples for serial wiring

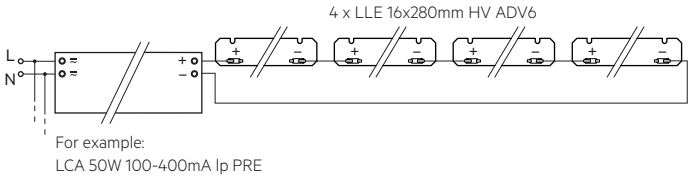


For example:
LCA 50W 100-400mA lp PRE

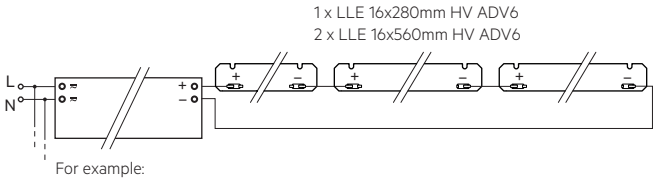

For example:
LCA 50W 100-400mA lp PRE

3.3 Wiring type and cross section

For wiring use solid wire from 0.14 to 0.5 mm².
No reconnection with smaller diameters possible if used with >0.34 mm².

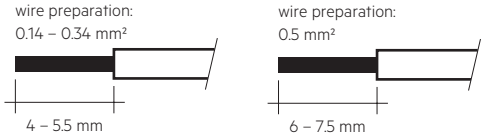


To remove the wires use a suitabel tool (Wago 206-859) or through twist and pull.

3.4 Mounting instruction

None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with M3 screws with plastic washers or ACL BRIDGE LLE16 PUSH-FIX.
All fastening point must be used for mounting.
The cut-outs on the end faces must not be used for fastening.

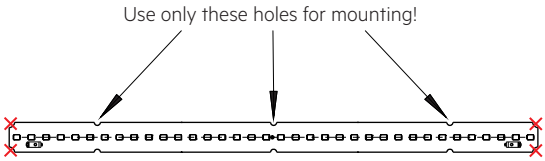

Only touch the module at the edge to separate the modules (see marking below).



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.
Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines

The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at:
http://www.tridonic.com/esd-protection

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux.
This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.
The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.
In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance for LLE 16mm HV ADV6

Forward current	tp temperature	L90 / B10	L90 / B50	L80 / B10	L80 / B50	L70 / B10	L70 / B50
700 mA	55 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h
	85 °C	52k h	52k h	> 102k h	> 102k h	> 102k h	> 102k h

L00C03 >102k h. At tp rated and I rated, based on 10 swichting cycles per day.

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3
30 s on / 30 s off at Imax

5. Electrical values

5.1 Declaration of electrical parameters

Irated … Nominal operating current the module is designed for.


Imax … Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple … Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current … The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current


LLE 16x70mm 325lm 9xx HV ADV6

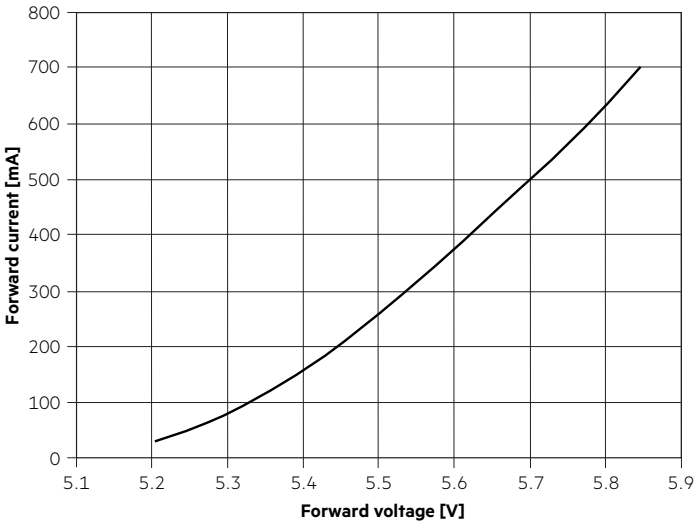


LLE 16x140mm 650lm 9xx HV ADV6

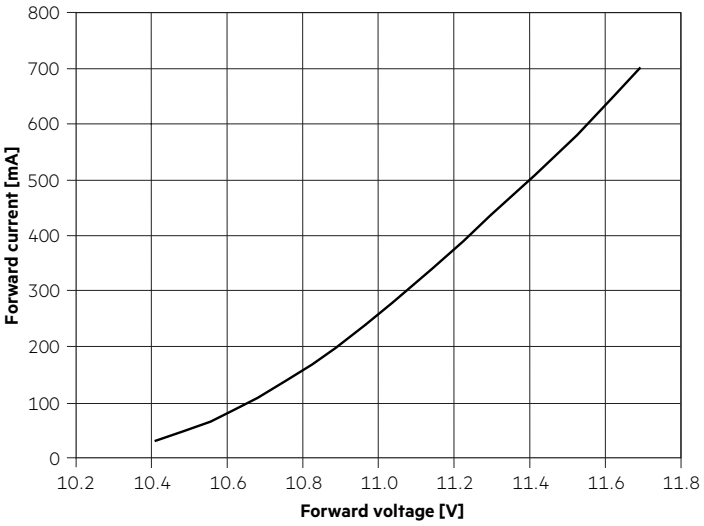

LLE 16x280mm 1250lm 9xx HV ADV6

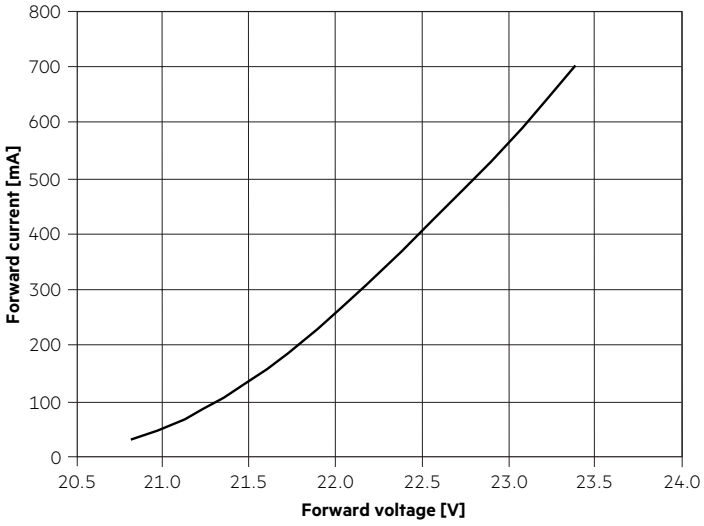


LLE 16x560mm 2400lm 9xx HV ADV6

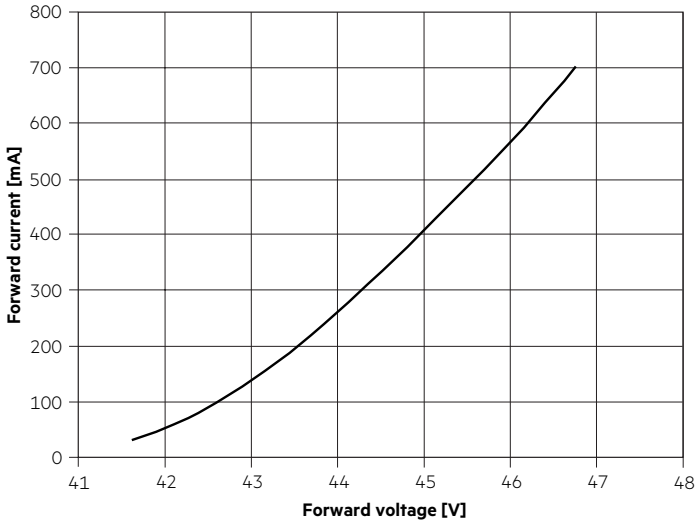

The diagrams are based on statistic values.
The real values can be different.

5.3 Forward voltage vs. tc temperature

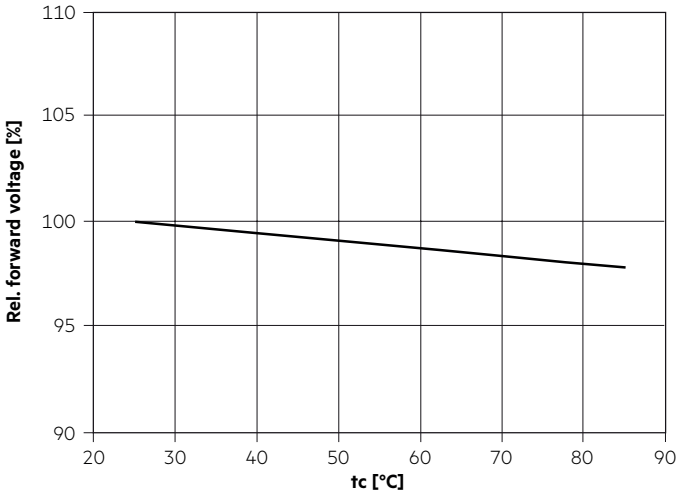

The diagrams are based on statistic values.
The real values can be different.


6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are integral measured by current impulse of 195 mA and a duration of 100 ms.
The ambient temperature of the measurement is ta = 25 °C.
The measurement tolerance of the colour coordinates are ± 0.01.

2,700 K

	x0	y0
Centre	0.4578	0.4101

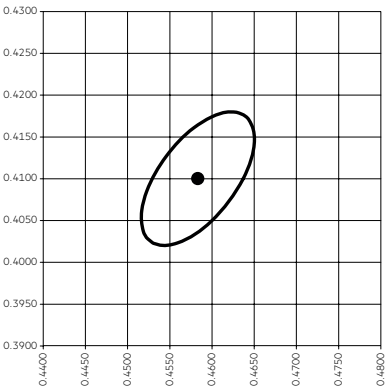


MacAdam Ellipse: 3SDCM

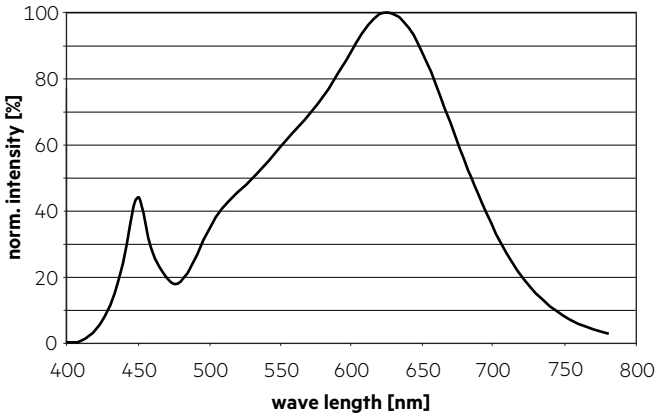


TM30		CRI	
Rf	Rg	Ra	R9
91	99	93	57

Colour vector graphic

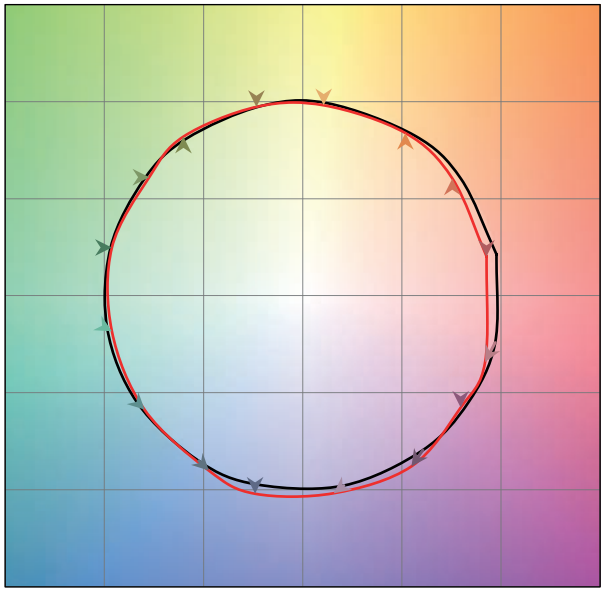


Reference source
Test source

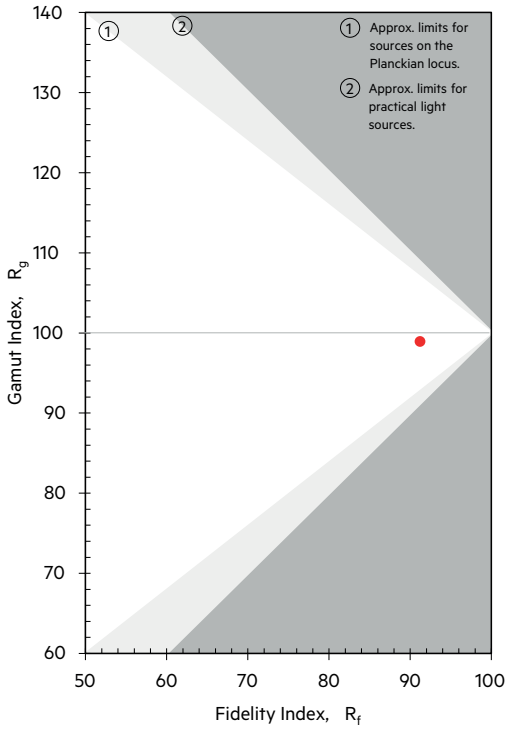


MacAdam Ellipse: 3SDCM

3,000 K

	x0	y0
Centre	0.4338	0.4030

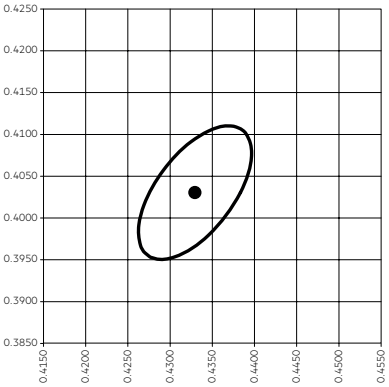


MacAdam Ellipse: 3SDCM

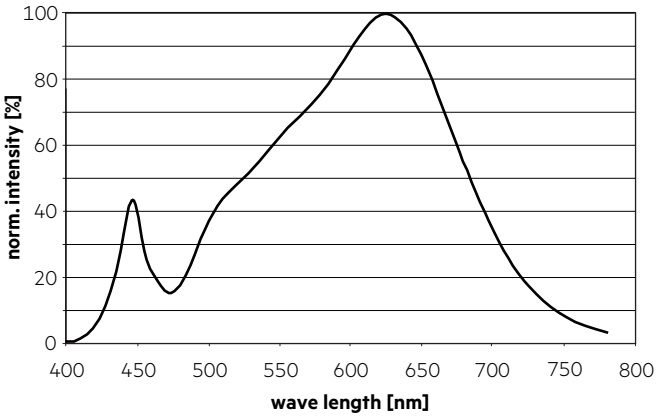


TM30		CRI	
Rf	Rg	Ra	R9
90	98	92	57

Colour vector graphic

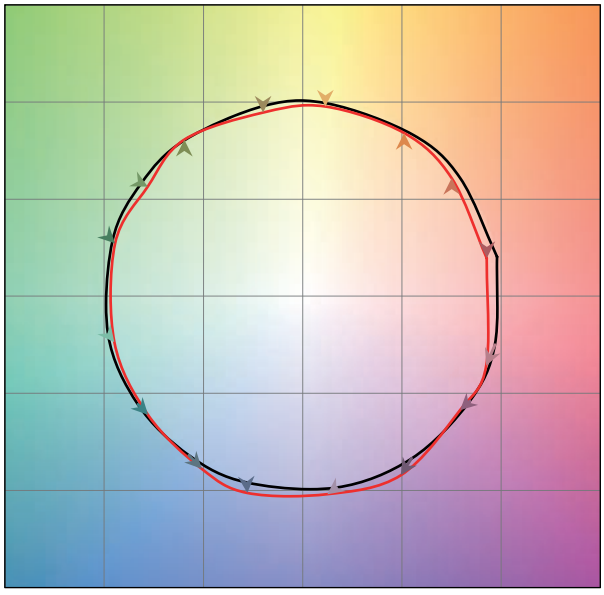


Reference source
Test source

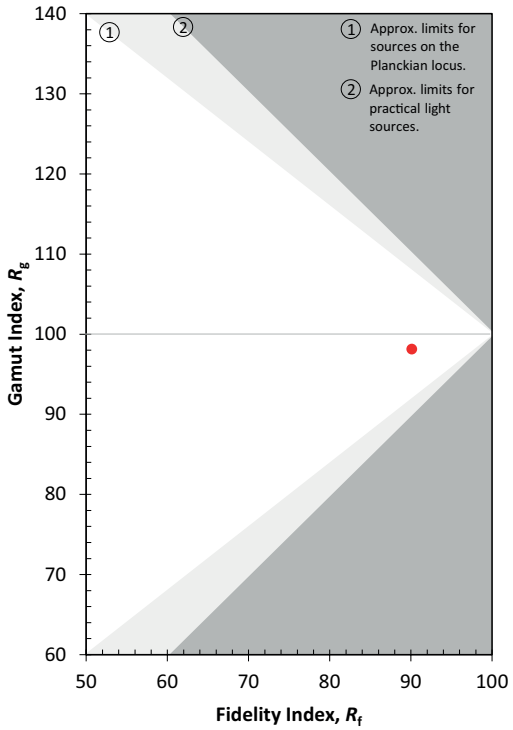


3,500 K

	x0	y0
Centre	0.4073	0.3917

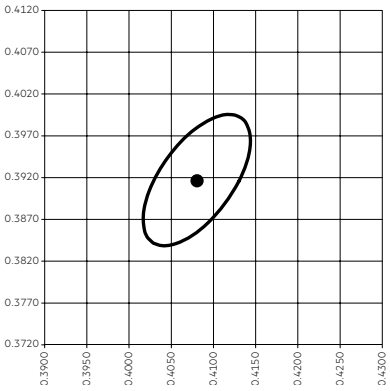


MacAdam Ellipse: 3SDCM

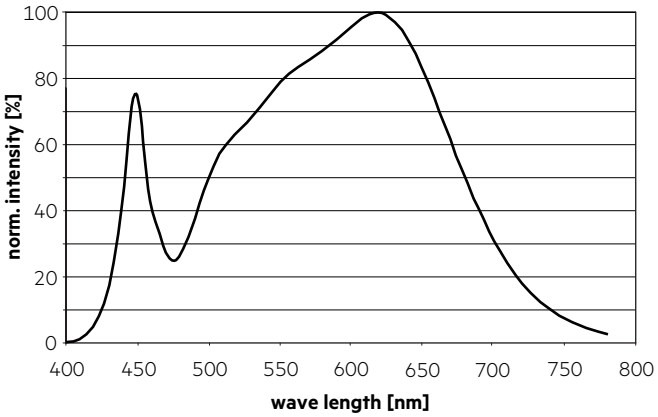


TM30		CRI	
Rf	Rg	Ra	R9
90	99	93	63

Colour vector graphic

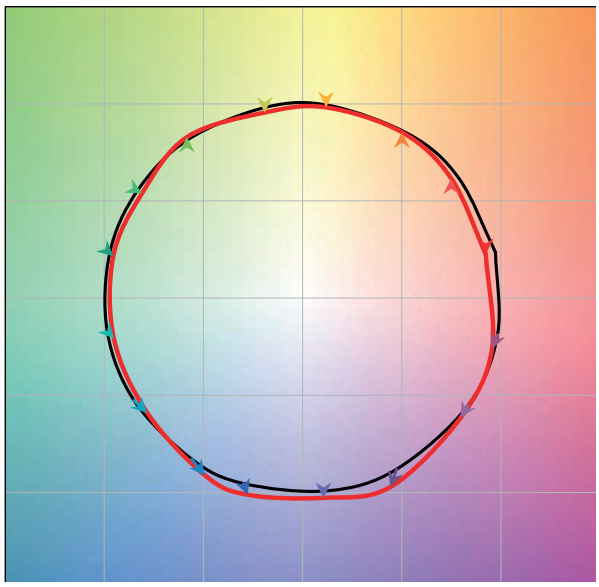


Reference source
Test source

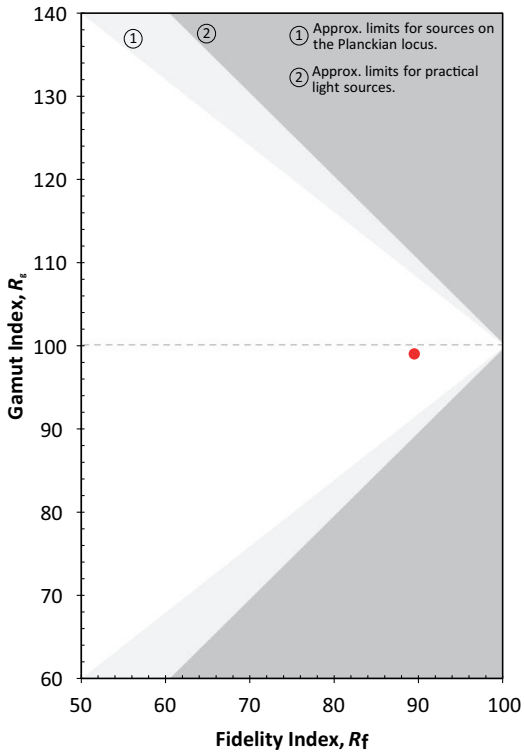


4,000 K

	x0	y0
Center	0.3818	0.3797

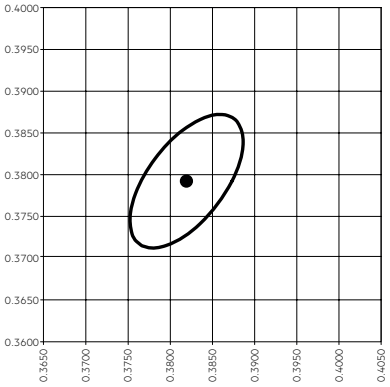


MacAdam Ellipse: 3SDCM

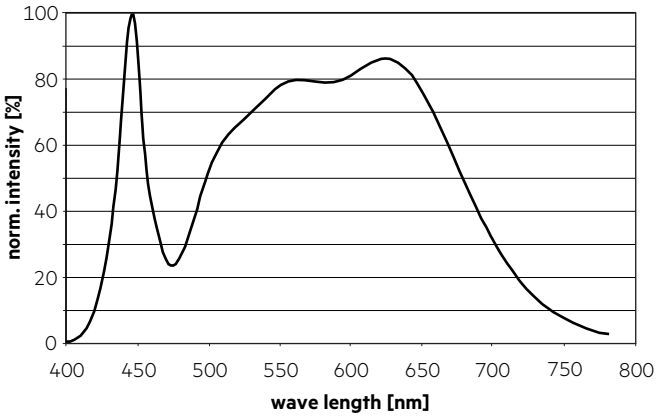


TM30		CRI	
Rf	Rg	Ra	R9
89	99	91	54

Colour vector graphic

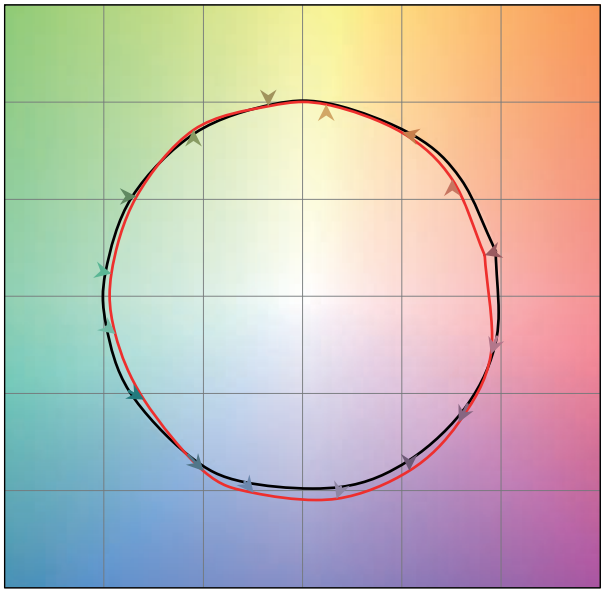


Reference source
Test source

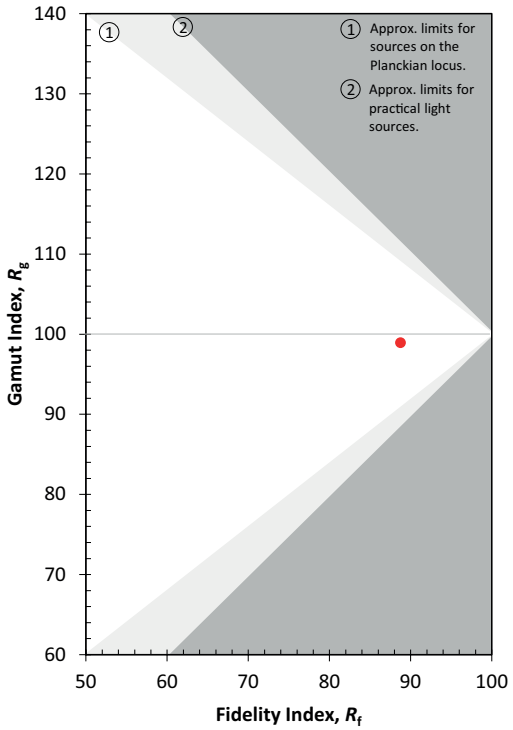


6.2 Light distribution

The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

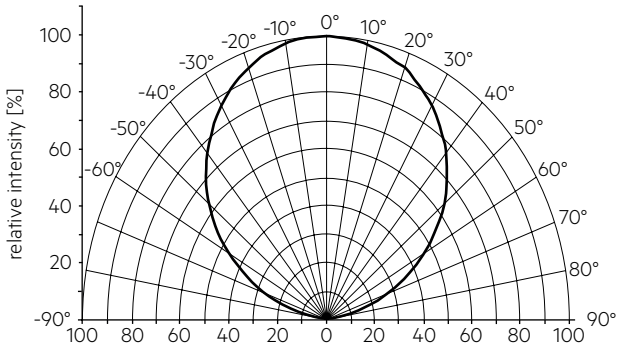


The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 5.
To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 4 cm) should be used.

6.3 Relative luminous flux vs. tc temperature

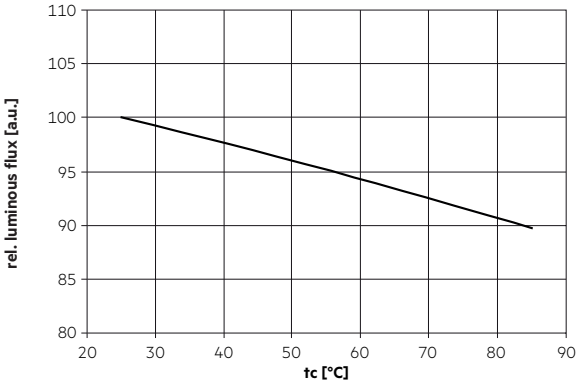

6.4 Relative luminous flux vs. operating current

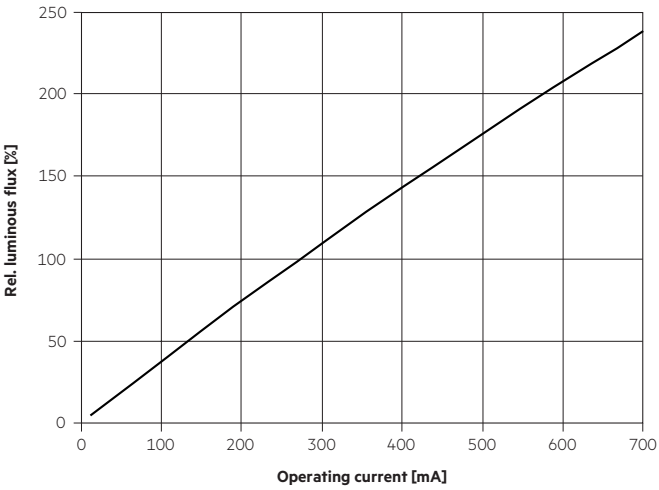

The diagrams are based on statistic values.
The real values can be different.

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.