A.A.G. STUCCHI

SENZAFINE FLAT CORE5

Codice prodotto / *Product code:*
M51235/B5-O-0

Modulo di luce lineare a 24V. Fissaggio meccanico. Per binari 9800 CORE5. Schermo opalino. L(mm): 1234,5. 3000K. CRI≥90: LED.
24V Linear light module. Mechanical fixing. For 9800 CORE5 tracks. Opal screen. L(mm): 1234,5. 3000K. CRI≥90: LED.

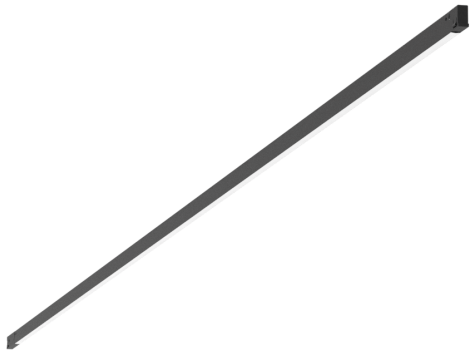

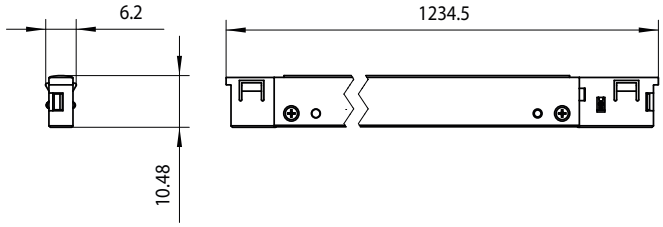

24V | IP20 | III SELV | CE

Real Flux (lm):	1006*
Nominal Flux (lm):	1629,6
Real Power (W):	17,3* ±10%
Efficiency (lm/W):	58,5*
LED source:	LED
Colour Temperature (K):	3000
CRI:	≥90
MacAdam:	≤3
Beam Angle:	127,6°
UGR:	X=4H Y=8H S=0.25H Reflection factors: 70/50/20 UGR transversal: 30,7 UGR axial: 31,1
Lifetime (Khr):	>50 L90B10
Driver:	0...10V
V_F:	~ 24
I LED (mA):	Alimentazione tensione costante *Constant voltage power supply*
L (mm):	1234,5
Weight (g):	85
Materials:	Schermo opalino in policarbonato + corpo in poliammide *Polycarbonate opal screen + polyamide body*
Colour:	Adattatore nero / *Black adapter*
Mounting:	Meccanico / *Mechanical*
Packaging:	Tubo / *Tube*

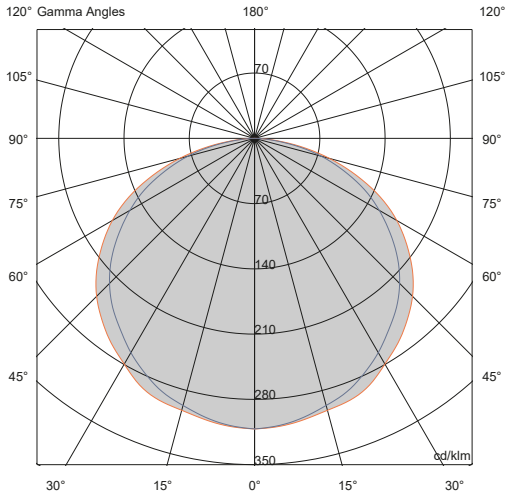

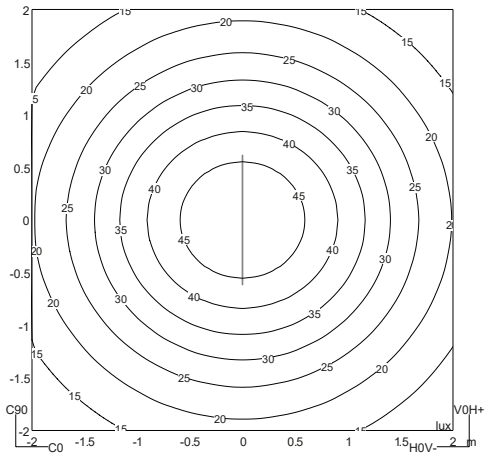

Room (m): 4x4x3h **H luminaire (m)**: 2,5 **Ref. surface:** floor

Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica. Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.

Other colour temperatures and CRI available upon request. All values marked with an (*) are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Luminous flux is subject to a normal technology drop over time. A.A.G. Stucchi reserves the right to make technical changes without prior notice.

A.A.G. STUCCHI s.r.l. u.s. - Via IV Novembre 30/32, 23854 Olginate (LC) - www.aagstucchi.it | info@aagstucchi.it