

Driver LC 28W 100-700mA flexC T EXC

excite in-track series

**Product description**

- _ Constant current / in-track LED driver
- _ Completely in-track, enabling a true no-compromise design
- _ Optional accessory for mounting the luminaire head
- _ Compatible with Global Trac PULSE from Nordic Aluminum and OneTrack from Stucchi, see data sheet
- _ For luminaires of protection class II
- _ Temperature protection as per EN 61347-2-13 C5e
- _ Selectable fixed output current via DIP switch 100 and 700 mA (pre-selected current 100 mA)
- _ Max. output power 28 W
- _ Up to 86 % efficiency
- _ Power input on stand-by < 0.5 W
- _ Nominal lifetime up to 100,000 h
- _ 5 years guarantee (conditions at <https://www.tridonic.com/manufacturer-guarantee-conditions>)

Housing properties

- _ Casing: polycarbonate, black, white or grey
- _ Type of protection IP20

Interfaces

- _ Terminal blocks: 45° push terminals

Functions

- _ Overtemperature protection
- _ Overload protection
- _ Short-circuit protection
- _ No-load protection
- _ Burst protection voltage 2 kV
- _ Surge protection voltage 1 kV (L to N)

Typical applications

- _ For spot light in retail and hospitality application

**Website**

<http://www.tridonic.com/28005610>



Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street



Decorative



High bay

Driver LC 28W 100-700mA flexC T EXC

excite in-track series

Ordering data

Type	Article number	Colour	Packaging, carton	Packaging, low volume	Weight per pc.
LC 28/100-700/40 FlexC Ti-B EXC	28005610	Black	50 pc(s).	1,600 pc(s).	0.1 kg
LC 28/100-700/40 FlexC Ti-W EXC	28005611	White	50 pc(s).	1,600 pc(s).	0.1 kg
LC 28/100-700/40 FlexC Ti-G EXC	28005612	Grey	50 pc(s).	1,600 pc(s).	0.1 kg

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
Max. input current (at 230 V, 50 Hz, full load)	0.15 A
Mains frequency	50 / 60 Hz
Max. input power	33 W
Max. output power	28 W
Typ. efficiency (at 230 V, 50 Hz, full load)	86 %
λ (at 230 V, 50 Hz, full load)	0.96
In-rush current (peak / duration)	0.25 A / 15 ms
Output current tolerance	± 5 %
Max. output peak current	735 mA
Max. output voltage (U-OUT)	60 V
THD (at 230 V, 50 Hz, full load)	< 20 %
Output LF current ripple (< 120 Hz)	± 0.2 %
Output P_ST_LM (at full load)	≤ 1
Output SVM (at full load)	≤ 0.4
Starting time (at 230 V, 50 Hz, full load)	< 0.5 s
Turn off time (at 230 V, 50 Hz, full load)	≤ 0.5 s
Ambient temperature t_a (at lifetime 100,000 h)	25 °C
Mains surge capability (between L - N)	1 kV
Lifetime	up to 50,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)
Dimensions L x W x H	300 x 28.4 x 13.8 mm

Approval marks

IP20 SELV                                     

Specific technical data


Type	Output current	Min. output voltage	Max. output voltage	Max. output power	t _c point max.	Ambient temperature T _a	I _{-out} select
LC 28/100-700/40 FlexC Ti-B EXC	100 mA	12 V	40 V	4 W	85 °C	-20 ... +35 °C	1=off / 2=off / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-B EXC	200 mA	12 V	40 V	8 W	85 °C	-20 ... +35 °C	1=off / 2=off / 3=on / 4=off
LC 28/100-700/40 FlexC Ti-B EXC	300 mA	12 V	40 V	12 W	85 °C	-20 ... +35 °C	1=off / 2=on / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-B EXC	400 mA	12 V	40 V	16 W	85 °C	-20 ... +35 °C	1=on / 2=off / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-B EXC	500 mA	12 V	40 V	20 W	85 °C	-20 ... +35 °C	1=on / 2=off / 3=on / 4=on
LC 28/100-700/40 FlexC Ti-B EXC	600 mA	12 V	40 V	24 W	85 °C	-20 ... +35 °C	1=on / 2=on / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-B EXC	700 mA	12 V	40 V	28 W	85 °C	-20 ... +35 °C	1=on / 2=on / 3=on / 4=on
LC 28/100-700/40 FlexC Ti-W EXC	100 mA	12 V	40 V	4 W	85 °C	-20 ... +35 °C	1=off / 2=off / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-W EXC	200 mA	12 V	40 V	8 W	85 °C	-20 ... +35 °C	1=off / 2=off / 3=on / 4=off
LC 28/100-700/40 FlexC Ti-W EXC	300 mA	12 V	40 V	12 W	85 °C	-20 ... +35 °C	1=off / 2=on / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-W EXC	400 mA	12 V	40 V	16 W	85 °C	-20 ... +35 °C	1=on / 2=off / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-W EXC	500 mA	12 V	40 V	20 W	85 °C	-20 ... +35 °C	1=on / 2=off / 3=on / 4=on
LC 28/100-700/40 FlexC Ti-W EXC	600 mA	12 V	40 V	24 W	85 °C	-20 ... +35 °C	1=on / 2=on / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-W EXC	700 mA	12 V	40 V	28 W	85 °C	-20 ... +35 °C	1=on / 2=on / 3=on / 4=on
LC 28/100-700/40 FlexC Ti-G EXC	100 mA	12 V	40 V	4 W	85 °C	-20 ... +35 °C	1=off / 2=off / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-G EXC	200 mA	12 V	40 V	8 W	85 °C	-20 ... +35 °C	1=off / 2=off / 3=on / 4=off
LC 28/100-700/40 FlexC Ti-G EXC	300 mA	12 V	40 V	12 W	85 °C	-20 ... +35 °C	1=off / 2=on / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-G EXC	400 mA	12 V	40 V	16 W	85 °C	-20 ... +35 °C	1=on / 2=off / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-G EXC	500 mA	12 V	40 V	20 W	85 °C	-20 ... +35 °C	1=on / 2=off / 3=on / 4=on
LC 28/100-700/40 FlexC Ti-G EXC	600 mA	12 V	40 V	24 W	85 °C	-20 ... +35 °C	1=on / 2=on / 3=off / 4=off
LC 28/100-700/40 FlexC Ti-G EXC	700 mA	12 V	40 V	28 W	85 °C	-20 ... +35 °C	1=on / 2=on / 3=on / 4=on

INVITRACK – THE INVISIBLE TRACK DRIVER

Nordic Power Converters and EUTRAC have joined forces, and combined cutting-edge LED drivers with world-class track components to fix an industry eye-sore; the new InviTrack driver series puts the entire LED driver inside the track. The driver is virtually invisible, the only thing seen on the track is your perfectly designed luminaire. Set your design free and improve the Quality of Light at the same time.

Product Advantages

- **Completely in-track**, enabling a true no-compromise design.
- **Flicker free**, no visible or perceivable flicker (IEEE1789 NOEL compliant, very low PstLM and SVM values).
- **Low temperature**, ensuring high reliability through high efficiency and good thermal design.
- **No inrush current**, enabling use of the full power rating of the main fuse.
- **Fits all major tracks**, including EUTRAC, Global, Stucchi, PowerGear and more.

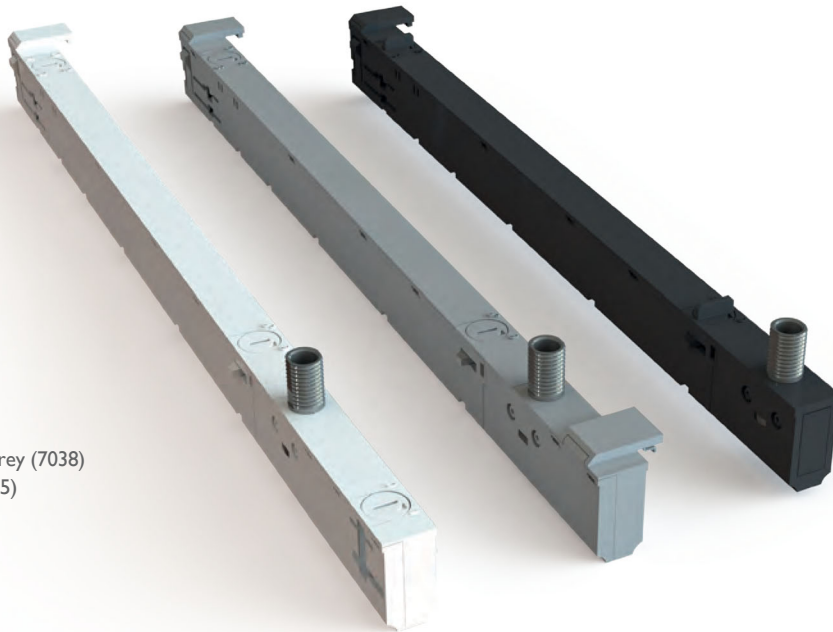

Available in
white (9016), grey (7038)
and black (9005)

Main specifications

Specification item	Value
Input voltage	220...240 V
PF	> 0.96
THD	< 20%
Inrush	>100 drivers on a MCB16A type B fuse
Efficiency	86%
Isolation	SELV/Class-II
Output power	28 W

Specification item	Value
Output current	100...700 mA
Output voltage	12...40 V
Size	300×13.8×28.4 mm
Luminaire weight, max	1.5 kg
Lifetime	50,000 hrs
Ambient temperature	-20 °C to 35 °C
Tcase max	85 °C

Electrical specifications


Input characteristics

Specification item	Value	Condition
Rated input voltage range	220...240 V _{AC}	Performance range
Rated input voltage	230 V _{AC}	
Rated input frequency range	50/60 Hz	Performance range
Rated input current	150 mA	@ 28 W _{out} and 230 V _{ac}
Rated input power	33 W	@ 28 W _{out} and 230 V _{ac}
Power factor	> 0.96	@ 28 W _{out} and 230 V _{ac}
Total harmonic distortion	< 20%	@ 28 W _{out} and 230 V _{ac}
Efficiency	86%	@ 28 W _{out} and 230 V _{ac}
Standby	0.25 W	
EU Ecodesign	Compliant	Requirements of December 2019
Input voltage range	198...264 V _{AC}	Operational range
Input frequency range	47...63 Hz	Operational range
Isolation input to output	SELV	
Inrush current I _{PEAK}	0.25 A	@ rated input voltage
Inrush current T _{WIDTH}	15 ms	@ rated input voltage @ 50% I _{PEAK}
Drivers/MCB I6A type B	> 100 pcs	


Output characteristics

Specification item	Value	Condition
Control method	Constant current	
Output voltage range	12...40 V _{DC}	
Output voltage (max)	60 V _{DC}	Peak voltage at open load
Output current range	100...700 mA	Set via dipswitch
Output current tolerance	±5%	@ 36 V _{DC}
Output flicker	IEEE1789 NOEL	Compliant with IEEE1789 No Observable Effect Limit
PstLM	< 0.1	@ 36 V _{dc} and 700 mA
SVM	< 0.05	@ 36 V _{dc} and 700 mA
Output current ripple, <120 Hz	0.2%	@ 36 V _{DC}
Output current ripple, <3 kHz	0.2%	@ 36 V _{DC}
Output power	28 W	@ 40 V _{DC}

Flicker measurement

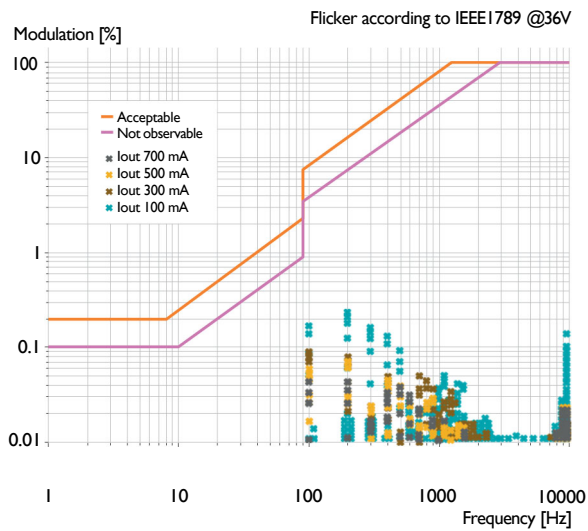


Output window

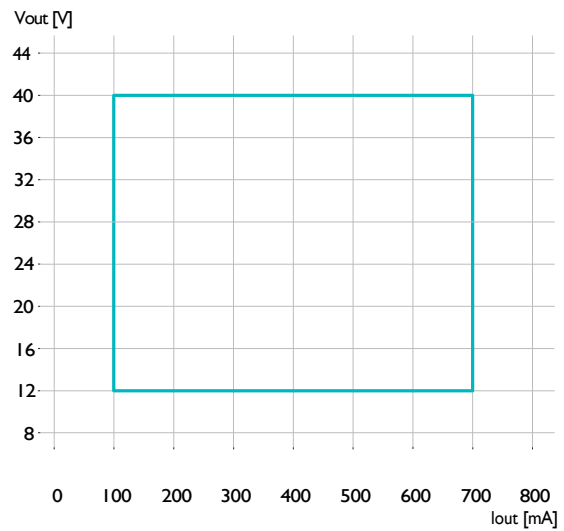

Wiring and connections


Specification item	Value	Condition
Output wire cross-section	0.2...0.75 mm ²	Solid or strand wire
	24...18 AWG	Solid or strand wire
Output wire strip length	7...9 mm	
Screw size	Torx 6	
Maximum cable length	300 mm	Total length of wiring including LED module, one way
Maximum luminaire weight	1.5 kg	According to EN 60570

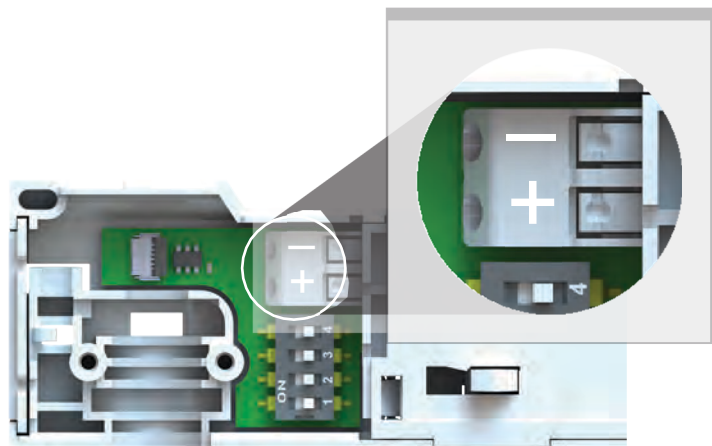

Set output current

Via dipswitch

Value	Switch 1	Switch 2	Switch 3	Switch 4	Value	Switch 1	Switch 2	Switch 3	Switch 4
700 mA	ON	ON	ON	ON	375 mA	–	ON	ON	ON
650 mA	ON	ON	ON	–	350 mA	–	ON	ON	–
600 mA	ON	ON	–	ON	325 mA	–	ON	–	ON
550 mA	ON	ON	–	–	300 mA	–	ON	–	–
500 mA	ON	–	ON	ON	250 mA	–	–	ON	ON
450 mA	ON	–	ON	–	200 mA	–	–	ON	–
425 mA	ON	–	–	ON	150 mA	–	–	–	ON
400 mA	ON	–	–	–	100 mA	–	–	–	–

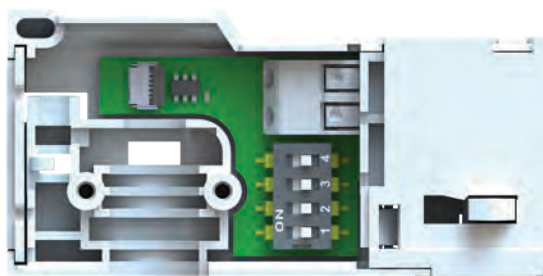

Compatible tracks

Manufacturer	Part number
Global	XTS Series, XTSF Series, XTSC Series, XTSCF Series
Stucchi	9000 ST, 9000A ST, 9000 R, 9000 H, 9000 ST15
EUTRAC	25 Series, 225 Series, 26 Series, 226 Series, 19 Series, 219 Series Onetrack surface (575 2 10)
PowerGear	PRO-04 Series, PRO-R4 Series, PRO-06 Series, PRO-R6 Series


Tests have been done with tracks taken from the market in 2020-2023.

Nordic Power Converters has no control or responsibility on any future or past possible changes made by different manufacturers that could affect the compatibility between tracks and adapters.

When product is used, a clearance distance between the InviTrack casing and any of the track's non-insulated live parts (incl. DALI conductors) must be minimum 3 mm. The retaining collar is not intended to be electrically connected to the LED output terminals or protective earth.

Dimensions and weight


Specification item	Value	Condition
Length	300 mm	See below
Width	13.8 mm	
Height	28.4 mm	Without retaining collar
Weight	110 g	

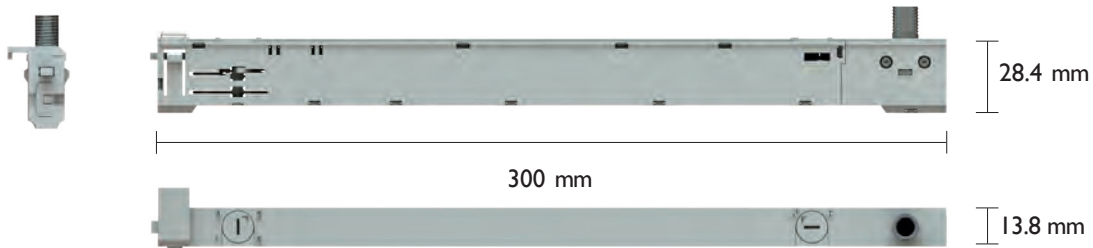

LC 28/100-700/40 flexC Ti EXC

Operating Conditions


Specification item	Value	Condition
Ambient temperature	-20...+35 °C	Higher ambient temperature allowed as long as $T_{\text{case-max}}$ is not exceeded
$T_{\text{case-max}}$	85 °C	Maximum temperature measured at $T_{\text{case-point}}$
$T_{\text{case-life}}$	85 °C	Measured at $T_{\text{case-point}}$
Relative humidity	5...85%	Non-condensing
Mains surge immunity (diff. mode)	1 kV	Acc. IEC61000-4-5 2 Ohm 1.2/50 us, 8/20 us
Mains surge immunity (comm. mode)	2 kV	Acc. IEC61000-4-5 2 Ohm 1.2/50 us, 8/20 us
Lifetime	50,000 hrs	Measured temperature at $T_{\text{case-point}}$ is $T_{\text{case-life}}$. Maximum failures = 10%
Warranty	5 years	

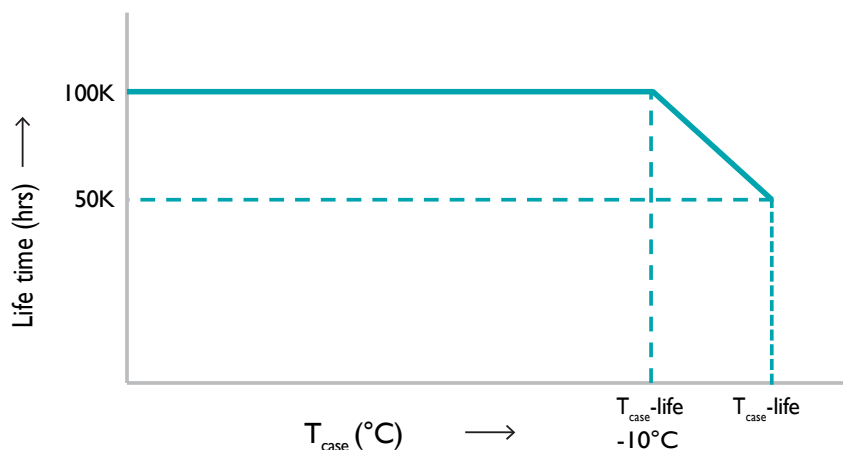


Conformity and standards

Specification item	Value	Condition
Protection class	Class II	
Isolation voltage	3 kV	
Casing class	IP20	
Approvals	CE	
EMC standards	EN 55015, EN 61547, EN 61000-3-2 (class C)	
CB certificate (safety standards)	IEC 61347-1, IEC 61347-2-13, IEC 60570, IEC 62384	The CB certificate includes EU group differences, AU and NZ


Efficiency vs. Output current

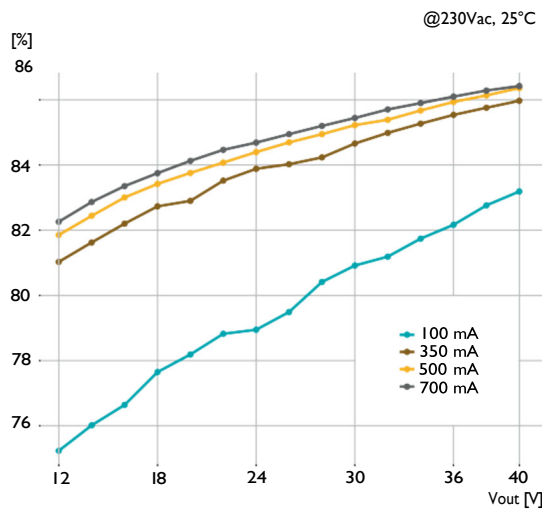


Efficiency vs. Input voltage

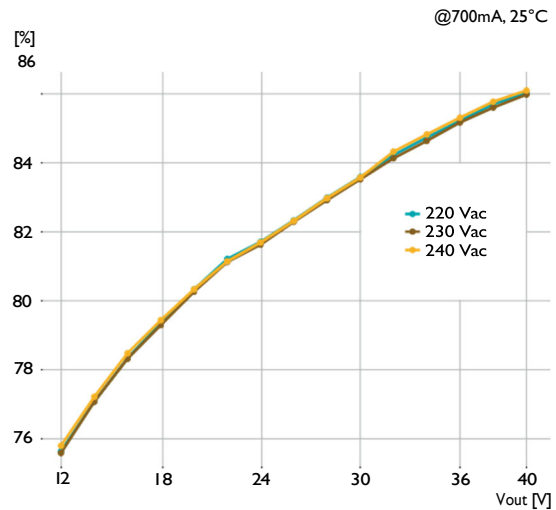


Efficiency vs. Temperature

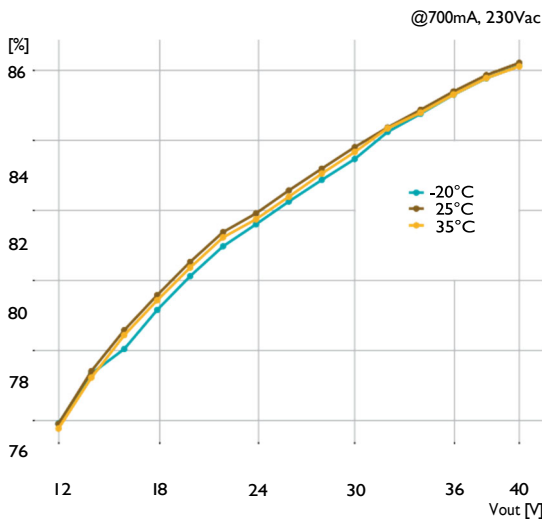

Power factor vs. Output current

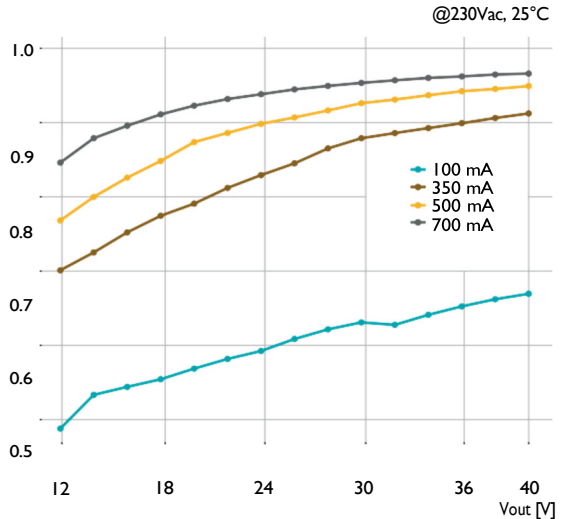

THD vs. Output current

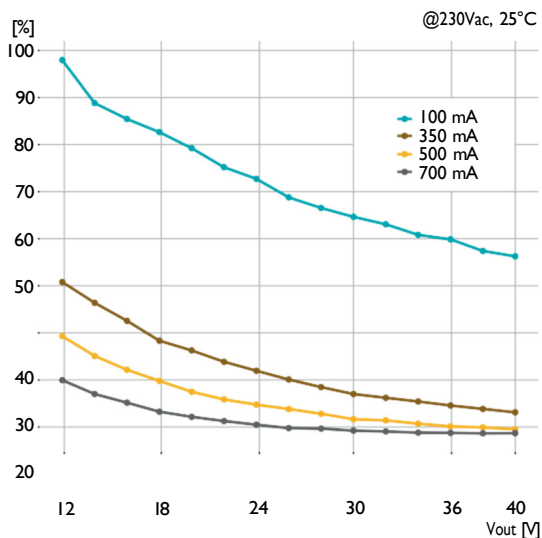

Dim Efficiency vs. Output voltage

